


LIGHTALK 3 (LA-95002)



Product description

Integral control gear - 1205 mm - Class I

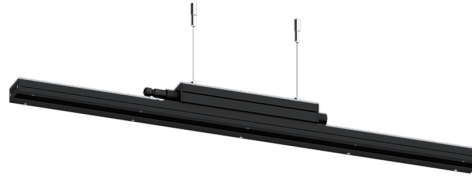


Luminaire Structure

- Die-cast aluminium end-caps
- Extruded aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry, through wiring upon request
- One IP67 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable


- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear
- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products

- Stainless steel suspension kit in grade 304
- Suspension height is fully adjustable


Optic

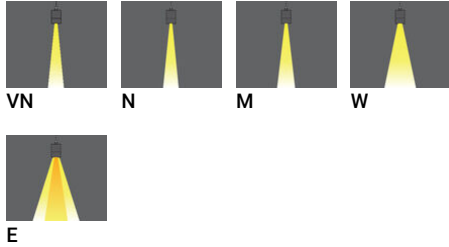

Product colour

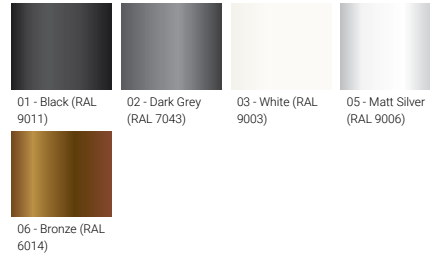

Special finishes upon request

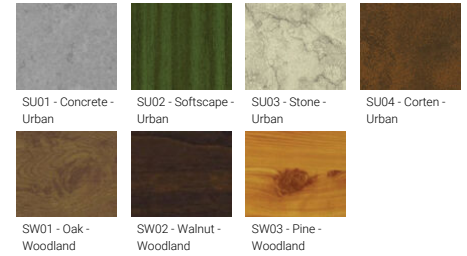


LIGHTALK 3 (LA-95002)

Technical information

Material	Aluminium	Optic	VN, N, M, W, E	Through wiring	Single cable entry, through wiring upon request
Light source	36 LED	Optic value	12°, 14°, 24°, 42°, 18° x 35°	Lens / Reflector / Optic	Clear toughened glass
Power	55 W	CCT / CRI	3000K CRI80, 4000K CRI80	MacAdam Ellipse	3 SDCM
Lumen	3908 - 5703 lm	Dimming type	On/Off, 1-10V, DALI	Lifetime L90B10 (hours)	> 120,000
Efficacy	71 - 104 lm/W	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Lifetime L80B10 (hours)	> 120,000
Driver option	Integral control gear			Lifetime L80B50 (hours)	> 120,000
Driver	Constant current (CC)			Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Input voltage	220-240 V 50/60 Hz	Weight	5.7 kg		
		Operating temperature	-20 °C to 40 °C		
		Cable	One IP67 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable		

LA-95002

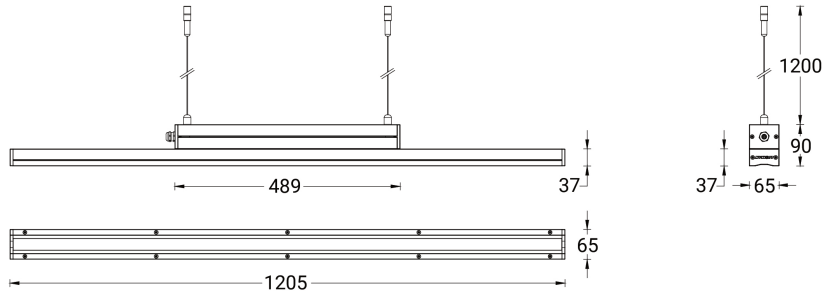

Accessories

DALI CONTROL

DALI Control System
Control-DALI