

LIGHTALK 4 (LA-95021)



Product description


Without remote box IP-rated - With remote driver -
Constant current (CC) 500 mA - 610 mm - Class I




Luminaire Structure

- Die-cast aluminium end-caps
- Extruded aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry, through wiring upon request
- One cable gland supplied with 0.3 m of 2x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (included)
- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products
- Stainless steel suspension kit in grade 304
- Suspension height is fully adjustable


Optic

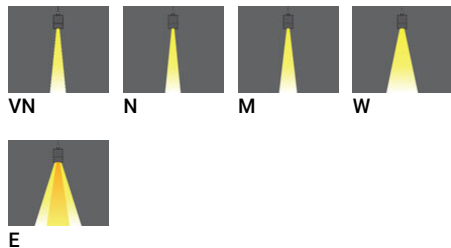

Product colour

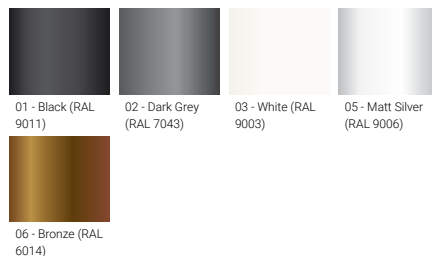

Special finishes upon request

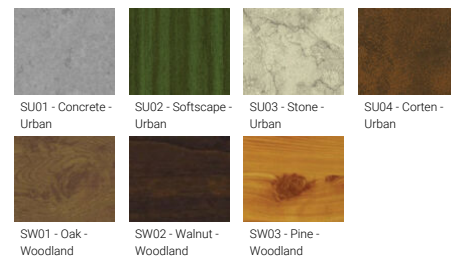


LIGHTALK 4 (LA-95021)

Technical information

Material	Aluminium	Optic	VN, N, M, W, E	Through wiring	Single cable entry, through wiring upon request
Light source	18 LED	Optic value	12°, 14°, 24°, 44°, 18° x 35°	Lens / Reflector / Optic	Clear toughened glass
Power	28 W	CCT / CRI	3000K CRI80, 4000K CRI80	MacAdam Ellipse	3 SDCM
Lumen	1943 - 2847 lm	Dimming type	On/Off, 1-10V, DALI	Lifetime L90B10 (hours)	> 120,000
Efficacy	69 - 102 lm/W	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Lifetime L80B10 (hours)	> 120,000
Driver option	Remote driver (included)		Lifetime L80B50 (hours)	> 120,000	
Driver	Constant current (CC)		Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)	
Input voltage	500 mA, 54 VDC	Weight	2.1 kg		
		Operating temperature	-20 °C to 40 °C		
		Cable	One cable gland supplied with 0.3 m of 2x1.0 sqmm outdoor cable		

LA-95021

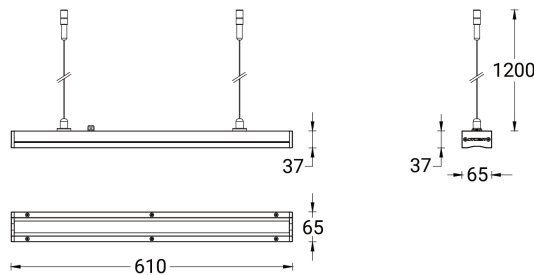

Accessories

