

## LIGHTALK 19 (LA-95051) (Version 1)



### Product description


Without remote driver - Constant voltage (CV) 24 V - 610 mm - Class III - RGBW




### Luminaire Structure

- Die-cast aluminium end-caps
- Extruded aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Four IP67 connectors supplied with 2x0.3 m of 2x1.0 sqmm outdoor cable and 2x0.3 m of 2x0.5 sqmm outdoor shielded cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (not included)
- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products
- Stainless steel suspension kit in grade 304
- Suspension height is fully adjustable


### Optic

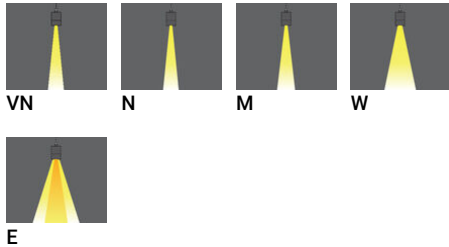

### Product colour

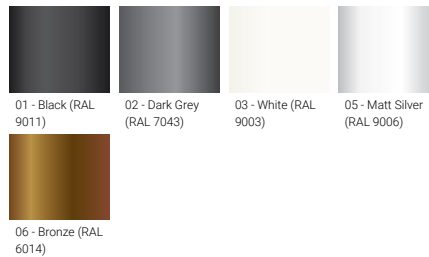

### Special finishes upon request

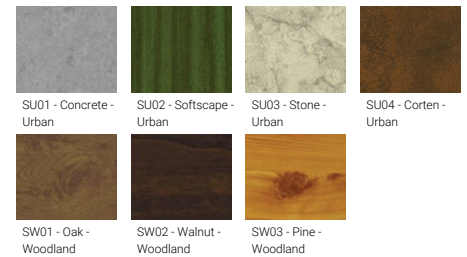


## LIGHTALK 19 (LA-95051) (Version 1)

### Technical information

|                      |                              |                      |                               |                                 |  |
|----------------------|------------------------------|----------------------|-------------------------------|---------------------------------|--|
| <b>Material</b>      | Aluminium                    | <b>Driver</b>        | Constant voltage (CV)         | <b>Product colours</b>          | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| <b>Light source</b>  | 20 LED                       | <b>Input voltage</b> | 24 VDC                        | <b>Weight</b>                   | 3.8 kg   |
| <b>Power</b>         | 33 W                         | <b>Optic</b>         | VN, N, M, W, E                | <b>Operating temperature</b>    | -20 °C to 40 °C  |
| <b>Lumen</b>         | 1592 - 1916 lm               | <b>Optic value</b>   | 10°, 13°, 24°, 43°, 16° x 35° | <b>Cable</b>                    | Four IP67 connectors supplied with 2x0.3 m of 2x1.0 sqmm outdoor cable and 2x0.3 m of 2x0.5 sqmm outdoor shielded cable  |
| <b>Efficacy</b>      | 48 - 58 lm/W                 | <b>CCT / CRI</b>     | RGBW30, RGBW40                | <b>Through wiring</b>           | Two cable entries for through wiring   |
| <b>Driver option</b> | Remote driver (not included) | <b>Dimming type</b>  | DMX, DMX/RDM                  | <b>Lens / Reflector / Optic</b> | Clear toughened glass  |

LA-95051

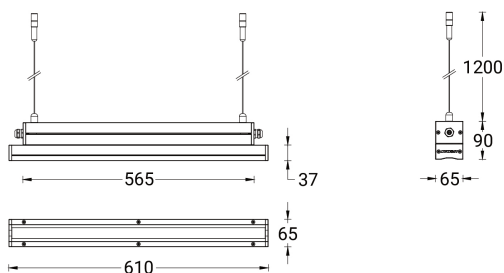

### Accessories

**DMX CONTROL**

DMX Control System  
Control-DMX

**DMX RDM CONTROL**

DMX/RDM Control System  
Control-DMX-RDM

Driver (CV) - On/Off - 36 W - IP67  
- 24 V  
**A34491-ND**

Driver (CV) - On/Off - 60 W - IP67  
- 24 V  
**A34591-ND**

**LIGHTALK 19** (LA-95051) (Version 1)




---

Driver (CV) - On/Off - 100 W -  
IP67 - 24 V  
**A34791-ND**

---




---

Driver (CV) - On/Off - 200 W -  
IP67 - 24 V  
**A34991-ND**

---




---

Driver (CV) - On/Off - 350 W -  
IP67 - 24 V  
**A35091-ND**

---