

LBX 1 (LB-40436)



Product description

Integral control gear - With recessing box - Class I



Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One cable gland supplied with 0.3 m of 3x0.5 sqmm outdoor cable

- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear


- Recessing box is included

Optic




G

Product colour

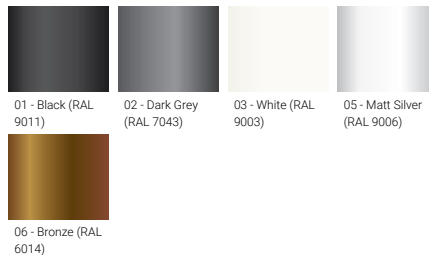

Special finishes upon request

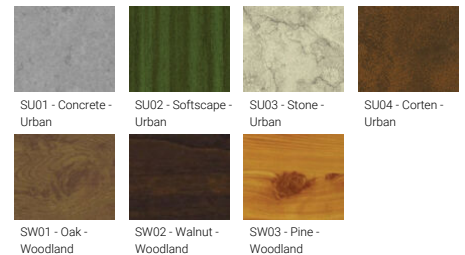

LBX 1 (LB-40436)

Technical information

Material	Aluminium	Optic value	34° x 68°	Operating temperature	-20 °C to 40 °C
Light source	1 LED	CCT / CRI	3000K CRI80, 4000K CRI80	Cable	One cable gland supplied with 0.3 m of 3x0.5 sqmm outdoor cable
Power	4 W	Bug	B0-U1-G0	Through wiring	Single cable entry
Lumen	39 lm	ULR	4%	Lens / Reflector / Optic	Clear toughened glass
Efficacy	10 lm/W	ULOR	4%	MacAdam Ellipse	3 SDCM
Driver option	Integral control gear	CIE flux code n°3	97	Lifetime L90B10 (hours)	> 120,000
Driver	Constant current (CC)	Dimming type	On/Off	Lifetime L80B10 (hours)	> 120,000
Input voltage	220-240 V 50/60 Hz	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Lifetime L80B50 (hours)	> 120,000
Optic	G			Weight	0.3 kg

LB-40436

