


LBX 2 (LB-40437) (Version 1)**Product description**

Without remote driver - With recessing box - Constant voltage (CV) 24 V - Class III

**Luminaire Structure**


- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One cable gland supplied with 0.3 m of 3x0.5 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (not included)
- Recessing box is included

Product colour

01 - Black (RAL 9011) 02 - Dark Grey (RAL 7043) 03 - White (RAL 9003) 05 - Matt Silver (RAL 9006)



06 - Bronze (RAL 6014)

Special finishes upon request

SU01 - Concrete - Urban SU02 - Softscape - Urban SU03 - Stone - Urban SU04 - Corten - Urban




SW01 - Oak - Woodland SW02 - Walnut - Woodland SW03 - Pine - Woodland

LBX 2 (LB-40437) (Version 1)

Technical information

Material	Aluminium	Input voltage	24 VDC	Product colours Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland		
Light source	1 LED	Optic value	34° x 68°			
Power	2 W	CCT / CRI	3000K CRI80, 4000K CRI80			
Lumen	39 lm	Bug	B0-U1-G0			
Efficacy	20 lm/W	ULR	4%			
Driver option	Remote driver (not included)	ULOR	4%			
Driver	Constant voltage (CV)	CIE flux code n°3	97			
					Weight	0.3 kg
					Operating temperature	-20 °C to 40 °C
					Cable	One cable gland supplied with 0.3 m of 3x0.5 sqmm outdoor cable
				Through wiring	Single cable entry	
				Lens / Reflector / Optic	Clear toughened glass	

LB-40437

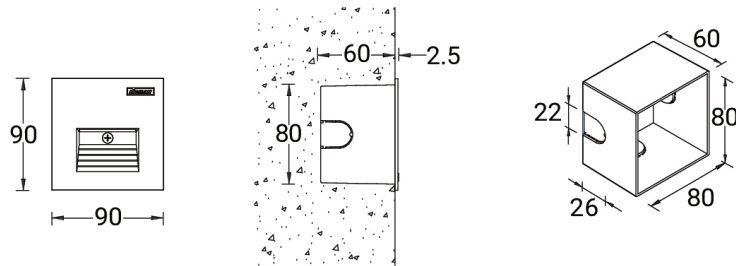

Accessories



DALI Control System
Control-DALI



Driver (CV) - On/Off - 36 W - IP67
- 24 V
A34491-ND



Driver (CV) - On/Off - 150 W -
IP67 - 24 V
A34891-ND



Driver (CV) - On/Off - 200 W -
IP67 - 24 V
A34991-ND

LBX 2 (LB-40437) (Version 1)

Driver (CV) - On/Off - 350 W -
IP67 - 24 V
A35091-ND



Driver (CV) - On/Off - 60 W - IP67
- 24 V
A34591-ND



Driver (CV) - On/Off - 100 W -
IP67 - 24 V
A34791-ND
