

LADOR 5 (LD-30001)



Product description

Integral control gear - 62x62 mm - Class I




Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Thermal heat dissipation body
- Single cable entry


- One cable gland supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass

- High-efficiency PMMA lens
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible


Optic



Product colour

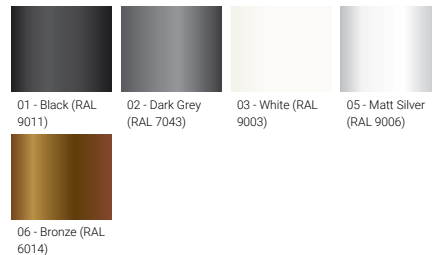

Special finishes upon request

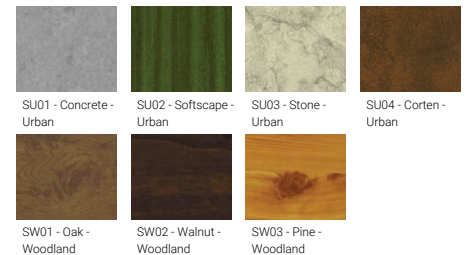


LADOR 5 (LD-30001)


Technical information

Material	Aluminium	Optic value	10°, 16°, 32°, 70°, 42°x11°	Operating temperature	-20 °C to 40 °C
Light source	1 LED	CCT / CRI	3000K CRI80, 4000K CRI80	Cable	One cable gland supplied with 0.2 m of 3x1.0 sqmm outdoor cable
Power	3 W	Bug	B0-U0-G0, B1-U0-G0	Through wiring	Single cable entry
Lumen	209 - 262 lm	ULR	0%	Lens / Reflector / Optic	Clear toughened glass, High-efficiency PMMA lens
Efficacy	70 - 87 lm/W	ULOR	0%	MacAdam Ellipse	3 SDCM
Driver option	Integral control gear	CIE flux code n°3	100	Lifetime L90B10 (hours)	> 120,000
Driver	Constant current (CC)	Dimming type	On/Off	Lifetime L80B10 (hours)	> 120,000
Input voltage	220-240 V 50/60 Hz	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Lifetime L80B50 (hours)	> 120,000
Optic	N, M, W, VW, E			Weight	0.8 kg


LD-30001




Top view



Bottom view



Side view



Accessories



Surface mounting box for easy cabling (LADOR 5)
SCE-LADOR-5