

LEGEND 1 (LE-40721-S)**Product description**

With recessing box - Stainless frame

**Luminaire Structure**

- Available with interchangeable aluminium or stainless steel grade 316 frames
- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance

- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket

- Opal UV-stabilised polycarbonate diffuser
- Integral control gear

Optic

G

Product colour


00 - Stainless Steel

LEGEND 1 (LE-40721-S)

Technical information

Material	Stainless Steel	Optic	G	Product colours	Stainless Steel
Light source	3 COB	Optic value	115°x180°	Weight	2.5 kg
Power	11.5 W	CCT / CRI	3000K CRI80, 4000K CRI80	Operating temperature	-20 °C to 45 °C
Lumen	375 - 405 lm	Bug	B0-U3-G1	Through wiring	Two cable entries for through wiring
Efficacy	33 - 35 lm/W	ULR	50%	Lens / Reflector / Optic	Opal UV-stabilised polycarbonate diffuser
Driver option	Integral control gear	ULOR	50%	MacAdam Ellipse	3 SDCM
Driver	Constant current (CC)	CIE flux code n°3	67	Lifetime L90B10 (hours)	> 50,000
Input voltage	220-240 V 50/60 Hz	Dimming type	On/Off, 1-10V, DALI	Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

LE-40721-S

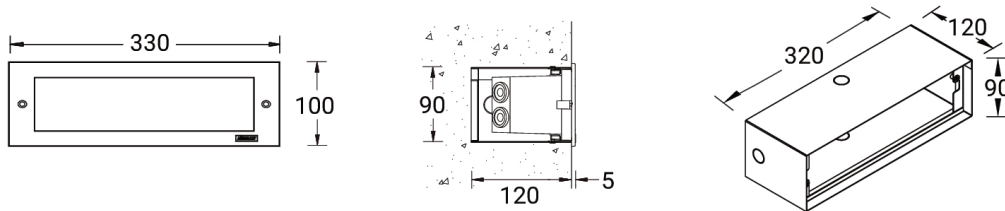

Accessories



DALI Control System
Control-DALI