

LEEDS 1 (LEE-30031)



Product description

Down (Optic) & Up (Optic 2nd) - Square




Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)


- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear

- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible


Optic

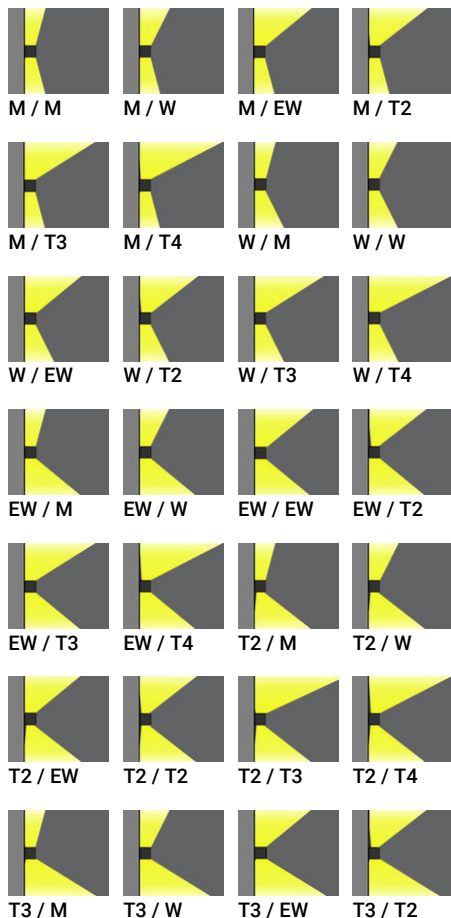

Product colour

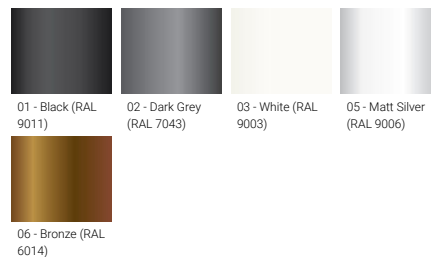

Special finishes upon request

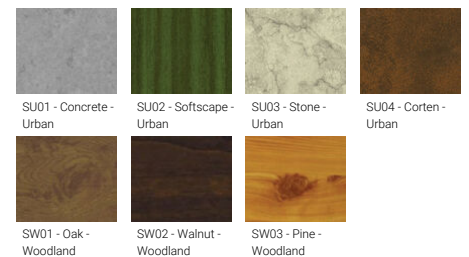


LEEDS 1 (LEE-30031)**T3 / T3** **T3 / T4** **T4 / M** **T4 / W****T4 / EW** **T4 / T2** **T4 / T3** **T4 / T4****ME / M** **ME / W** **ME / EW** **ME / T2****ME / T3** **ME / T4**

LEEDS 1 (LEE-30031)

Technical information

Material	Aluminium	Optic (2nd)	M, W, EW, T2, T3, T4	Weight	1.1 kg
Light source	4 & 4 LED	Optic (2nd) value	30°, 56°, 99°x102°, 129°x49°, 112°x80°, 89°x60°	Operating temperature	-20 °C to 40 °C
Power	15 W	CCT / CRI	3000K CRI80, 4000K CRI80	Through wiring	Single cable entry
Lumen	1152 - 1590 lm	Bug	B0-U4-G0, B1-U4-G0, B1-U4-G1		Clear toughened glass, High-efficiency PMMA lens
Driver option	Integral control gear		43%, 44%, 45%, 46%, 47%, 48%, 49%, 50%, 51%, 52%, 53%, 54%, 55%, 56%, 57%, 6%	Lens / Reflector / Optic	
Driver	Constant current (CC)	ULR		MacAdam Ellipse	3 SDCM
Input voltage	220-240 V 50/60 Hz		43%, 44%, 45%, 46%, 47%, 48%, 49%, 50%, 51%, 52%, 53%, 54%, 55%, 56%, 57%, 6%	Lifetime L90B10 (hours)	> 90,000
Optic	M, W, EW, T2, T3, T4, ME	ULOR		Lifetime L80B10 (hours)	> 90,000
Optic value	30°, 56°, 99°x102°, 129°x49°, 112°x80°, 89°x60°, 122°x50°	CIE flux code n°3	100, 99	Lifetime L80B50 (hours)	> 90,000
		Dimming type	On/Off		
		Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland		

LEE-30031

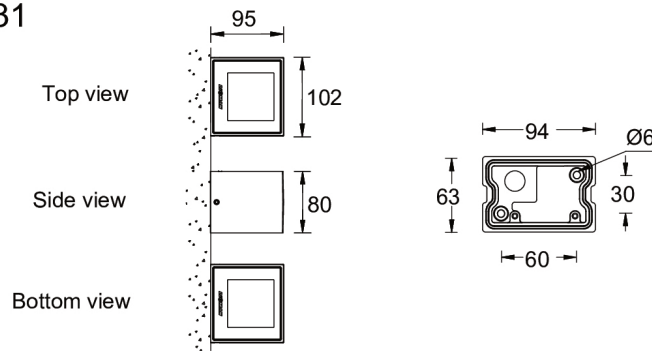

Accessories



Surface mounting box for easy cabling (LEEDS 1)
SCE-LEEDS-1