


**LIGHT LINEAR PT 2 (LI-10032-SB)**



**Product description**


200x80 mm - 1000 mm - 2 sides - With integrated security core (Anti-traffic)

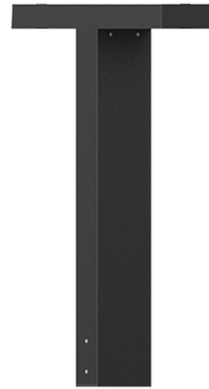


**Luminaire Structure**

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear


**Optic**



**Product colour**

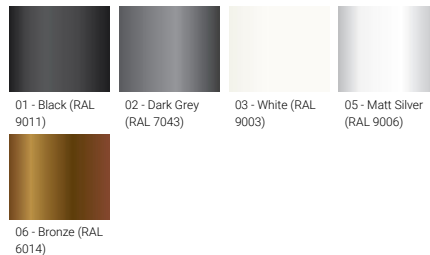

**Special finishes upon request**

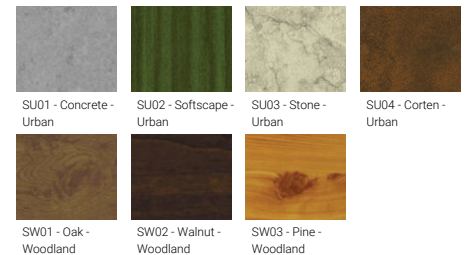

**LIGHT LINEAR PT 2 (LI-10032-SB)**

**Technical information**

<b>Light source</b>	2 x 24 LED
<b>Power</b>	108 W
<b>Lumen</b>	11002 - 12386 lm
<b>Efficacy</b>	102 - 115 lm/W
<b>Driver option</b>	Integral control gear
<b>Driver</b>	Constant current (CC)
<b>Input voltage</b>	220-240 V 50/60 Hz
<b>Optic</b>	T2, T3, T4
<b>Optic value</b>	142°x53°, 141°x69°, 99°x79°

<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80
<b>Bug</b>	B1-U0-G1, B2-U0-G2
<b>ULR</b>	0%
<b>ULOR</b>	0%
<b>CIE flux code n°3</b>	97, 98
<b>Dimming type</b>	On/Off, 1-10V, DALI

<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
------------------------	--

<b>Weight</b>	15.8 kg
<b>Operating temperature</b>	-20 °C to 40 °C

<b>Cable</b>	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
--------------	--

<b>Through wiring</b>	Single cable entry
<b>Lens / Reflector / Optic</b>	Clear toughened glass, High-efficiency PMMA lens

<b>MacAdam Ellipse</b>	3 SDCM
------------------------	--------


<b>Lifetime L90B10 (hours)</b>	> 90,000
--------------------------------	----------

<b>Lifetime L80B10 (hours)</b>	> 90,000
--------------------------------	----------

<b>Lifetime L80B50 (hours)</b>	> 90,000
--------------------------------	----------

<b>Variants (On/Off, 1-10V, DALI)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
---------------------------------------	---

LI-10032-SB

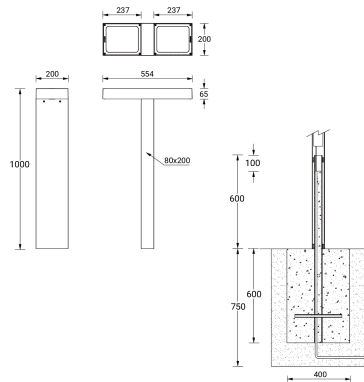

**Accessories**



DALI Control System  
Control-DALI