


LIGHT LINEAR PT 4 (LI-21172-LC)



Product description

1 side - Supplied with specific square, straight aluminium pole - Height options: 3 - 6 m - LIGHTCONNECT™

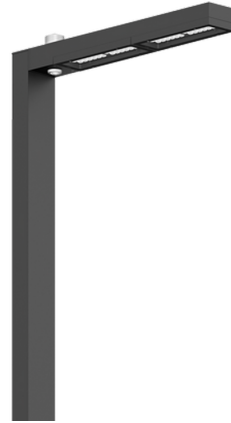

Luminaire Structure


- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency polycarbonate lens
- Integral control gear
- Maximum wind load resistance is 100 km/h
- Surge protection 10kV

Optic




T4

Product colour

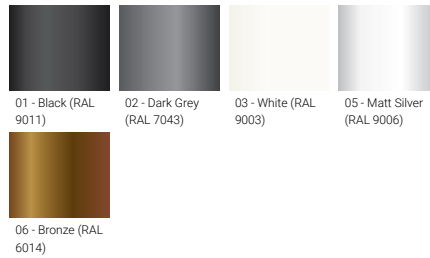

Special finishes upon request

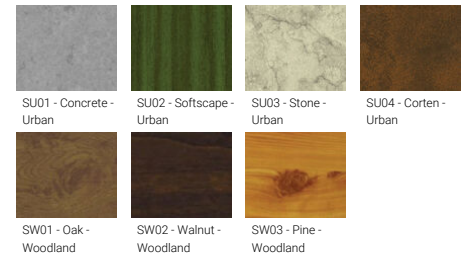

LIGHT LINEAR PT 4 (LI-21172-LC)


Technical information

Material	Aluminium
Light source	4 x 12 LED
Power	105 W
Lumen	10921 - 12518 lm
Efficacy	104 - 119 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz

Optic	T2, T3, T4
Optic value	139°x47°, 132°x68°, 98°x73°
CCT / CRI	3000K CRI80, 4000K CRI80
Dimming type	DALI
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	31.5 kg
Operating temperature	-20 °C to 40 °C
Through wiring	Single cable entry

Lens / Reflector / Optic	Clear toughened glass, High-efficiency polycarbonate lens
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 90,000
Lifetime L80B10 (hours)	> 90,000
Lifetime L80B50 (hours)	> 90,000
Variants (DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

LIGHT LINEAR PT 4
LI-21172

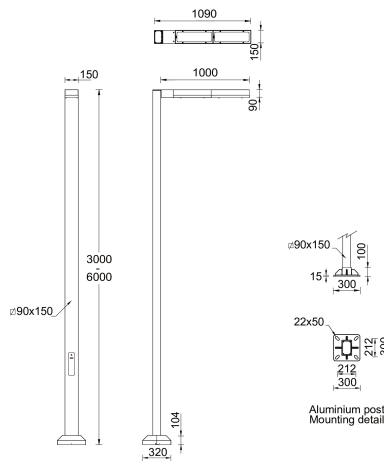

Accessories



Circuit breaker box IP44
A21291



Root mount kit
A20891



Zhaga Book 18 socket (Down)
A90991-D



Zhaga Book 18 socket (Up)
A90991-U

LIGHT LINEAR PT 4 (LI-21172-LC)

Motion sensor - PIR - DALI - Up
to 12 m
A91691-L7



Motion sensor - PIR - DALI - Up
to 3 m
A91691-L2



NEMA 7 socket
A90891



5 m - Square, straight aluminium
pole for LIGHT LINEAR PT - 1
side
APC150090-PT4-LI-21172



4 m - Square, straight aluminium
pole for LIGHT LINEAR PT - 1
side
APC140090-PT4-LI-21172



3 m - Square, straight aluminium
pole for LIGHT LINEAR PT - 1
side
APC130090-PT4-LI-21172



Internal cable support for pole 3
m
A23991



Internal cable support for pole 4
m
A24091



Internal cable support for pole 5
m
A24191



Internal cable support for pole 6
m
A24291



6 m - Square, straight aluminium
pole for LIGHT LINEAR PT - 1
side
APC160090-PT4-LI-21172



DALI Control System
Control-DALI