


**LIGHT LINEAR PT 3 (LI-21173-LC)**



**Product description**

1 side - Supplied with specific square, straight aluminium pole - Height options: 3 - 6 m - LIGHTCONNECT™

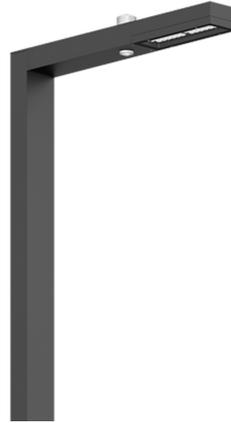

**Luminaire Structure**

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency polycarbonate lens
- Integral control gear
- Maximum wind load resistance is 100 km/h
- Surge protection 10kV

**Optic**




T4

**Product colour**




**Special finishes upon request**

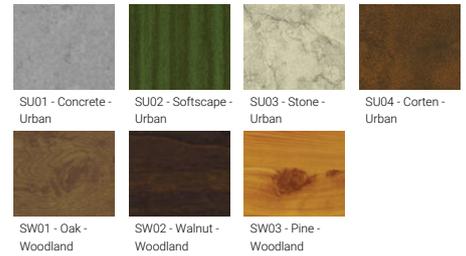

**LIGHT LINEAR PT 3 (LI-21173-LC)**

**Technical information**

<b>Material</b>	Aluminium	<b>Driver</b>	Constant current (CC)	<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Light source</b>	2 x 12 LED	<b>Input voltage</b>	220-240 V 50/60 Hz		
<b>Power</b>	82 W	<b>Optic</b>	T2, T3, T4		
<b>Lumen</b>	7476 - 8448 lm	<b>Optic value</b>	139°x53°, 132°x70°, 91°x75°		
<b>Efficacy</b>	91 - 103 lm/W	<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80	<b>Weight</b>	29.5 kg
<b>Driver option</b>	Integral control gear	<b>Dimming type</b>	DALI		<b>Operating temperature</b>
				<b>Through wiring</b>	Single cable entry
				<b>Lens / Reflector / Optic</b>	Clear toughened glass, High-efficiency polycarbonate lens

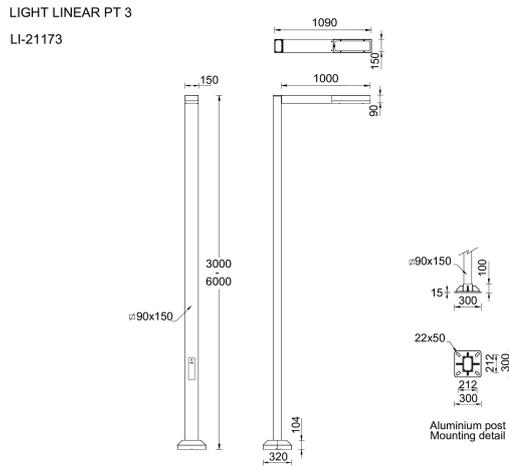

**Accessories**



Circuit breaker box IP44  
**A21291**



Root mount kit  
**A20891**



Zhaga Book 18 socket (Down)  
**A90991-D**



Zhaga Book 18 socket (Up)  
**A90991-U**



Motion sensor - PIR - DALI - Up to 12 m  
**A91691-L7**



Motion sensor - PIR - DALI - Up to 3 m  
**A91691-L2**



NEMA 7 socket  
**A90891**



Internal cable support for pole 3 m  
**A23991**

**LIGHT LINEAR PT 3 (LI-21173-LC)**

Internal cable support for pole 4  
m  
**A24091**



Internal cable support for pole 5  
m  
**A24191**



Internal cable support for pole 6  
m  
**A24291**



3 m - Square, straight aluminium  
pole for LIGHT LINEAR PT - 1  
side  
**APC130090-PT3-LI-21173**



4 m - Square, straight aluminium  
pole for LIGHT LINEAR PT - 1  
side  
**APC140090-PT3-LI-21173**



5 m - Square, straight aluminium  
pole for LIGHT LINEAR PT - 1  
side  
**APC150090-PT3-LI-21173**



6 m - Square, straight aluminium  
pole for LIGHT LINEAR PT - 1  
side  
**APC160090-PT3-LI-21173**



DALI Control System  
**Control-DALI**