


LIGHT LINEAR PT 11 (LI-30021)




Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear


Optic



Product colour

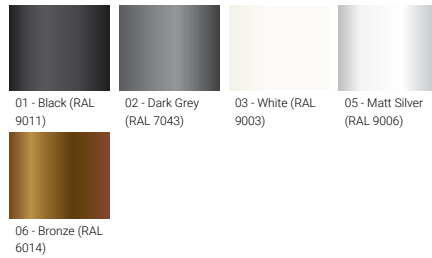

Special finishes upon request

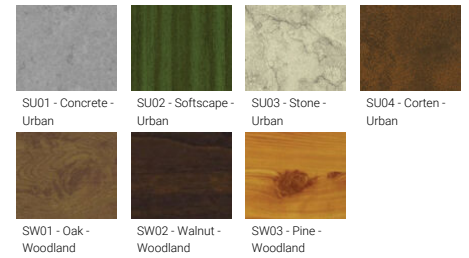


LIGHT LINEAR PT 11 (LI-30021)

Technical information

Material	Aluminium	Optic value	142°x50°, 141°x69°, 99°x80°, 137°x58°	Operating temperature	-20 °C to 40 °C
Light source	12 LED	CCT / CRI	3000K CRI80, 4000K CRI80	Through wiring	Single cable entry
Power	28 W	Bug	B1-U0-G1	Lens / Reflector / Optic	Clear toughened glass, High-efficiency PMMA lens
Lumen	2932 - 3169 lm	ULR	0%	MacAdam Ellipse	3 SDCM
Efficacy	105 - 113 lm/W	ULOR	0%	Lifetime L90B10 (hours)	> 90,000
Driver option	Integral control gear	CIE flux code n°3	97, 98	Lifetime L80B10 (hours)	> 90,000
Driver	Constant current (CC)	Dimming type	On/Off, 1-10V, DALI	Lifetime L80B50 (hours)	> 90,000
Input voltage	220-240 V 50/60 Hz	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Variants (1-10V)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Optic	T2, T3, T4, ME				
		Weight	4.9 kg		

LI-30021

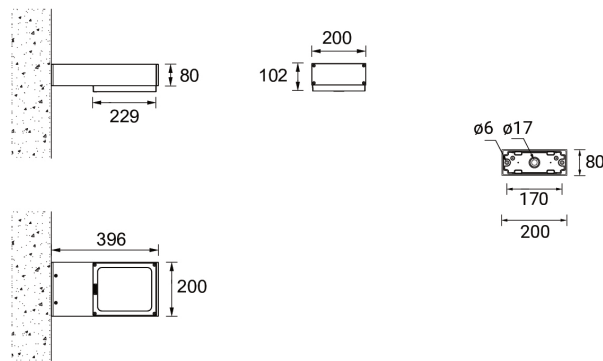

Accessories

