


**LISSE 1 (LSS-30001) (Version 1)****Product description**

LED pixel dot - Without remote driver - Constant voltage (CV) 24 V - Flat lens - Clear cover - RGBW

**Luminaire Structure**

- Aluminum housing and polycarbonate cover
- Cover options: Clear, Opal, Diamond
- Two cable entries for through wiring
- Flat lens, clear polycarbonate cover
- Remote driver (not included)
- Uniform light distribution with uninterrupted end-to-end mounting.
- 24 VDC input, DMX512 address with stable signal

**Optic****G****Product colour**


01 - Black (RAL 9011)

**LISSE 1 (LSS-30001) (Version 1)**

**Technical information**

<b>Material</b>	Aluminium	<b>Driver</b>	Constant voltage (CV)	<b>Dimming type</b>	DMX
<b>Light source</b>	12 LED	<b>Input voltage</b>	24 VDC	<b>Product colours</b>	Black
<b>Power</b>	3.4 W	<b>Optic</b>	G	<b>Weight</b>	0.075 kg
<b>Lumen</b>	92 lm	<b>Optic value</b>	90°	<b>Operating temperature</b>	-20 °C to 50 °C
<b>Efficacy</b>	27 lm/W	<b>CCT / CRI</b>	RGBW40	<b>Through wiring</b>	Two cable entries for through wiring
<b>Driver option</b>	Remote driver (not included)	<b>Bug</b>	B0-U1-G0	<b>Lens / Reflector / Optic</b>	Flat lens, clear polycarbonate cover

**LSS-30001**

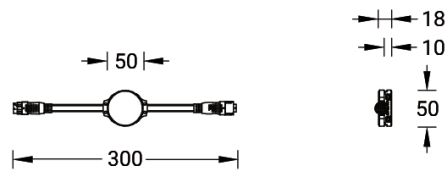

CLEAR PC

**Accessories**



DMX address writer for LISSE  
**A612691**



Pharos - LPCX Lighting Playback Controller X  
**A66991**



Cable - Connector IP65 Female + Male 5 Pin Power for LISSE  
**A612791**



Cable - T for LISSE  
**A612891**



End Cap - Terminated with resistor 120 Ohm for LISSE  
**A612091**



Mounting rail for LISSE  
**A613091**



Driver (CV) - On/Off - 36 W - IP67 - 24 V  
**A34491-ND**



Driver (CV) - On/Off - 60 W - IP67 - 24 V  
**A34591-ND**

**LISSE 1** (LSS-30001) (Version 1)



---

Driver (CV) - On/Off - 100 W -  
IP67 - 24 V  
**A34791-ND**

---



---

Driver (CV) - On/Off - 150 W -  
IP67 - 24 V  
**A34891-ND**

---



---

DMX Control System  
**Control-DMX**

---



---

Pharos - EDN 10  
**A65391**

---