

MALTA 1 (MAT-30002) (Version 1)**Product description**

Without remote driver - Constant voltage (CV) 24 V -
Stainless steel - IP65 - TW

**Luminaire Structure**

- Aluminium or stainless steel body
- Single cable entry
- One cable gland supplied with 1 m of 2x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)

- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Remote driver (not included)
- Standard unit length is 1 m, different lengths are available upon request

- All handrails and components are delivered completely pre-assembled for on-site installation
- LIGMAN prepares project handrail solutions according to layout drawings, elevations and project's brief; offering an end-to-end solution from concept through to implementation

Optic**G****Product colour**


00 - Stainless Steel

MALTA 1 (MAT-30002) (Version 1)

Technical information

Material	Stainless Steel	Optic	G	Product colours	Stainless Steel
Light source	84 LED/m	Optic value	60°x111°	Weight	3.5 kg/m
Power	12 W	CCT / CRI	TW (2700K - 6500K)	Operating temperature	-20 °C to 40 °C
Lumen	376 lm	Bug	B0-U0-G0	Cable	One cable gland supplied with 1 m of 2x1.0 sqmm outdoor cable
Efficacy	42 lm/W	ULR	0%	Through wiring	Single cable entry
Driver option	Remote driver (not included)	ULOR	0%	Lens / Reflector / Optic	High-efficiency PMMA lens
Driver	Constant voltage (CV)	CIE flux code n°3	98		
Input voltage	24 VDC	Dimming type	DALI		

MAT-30002

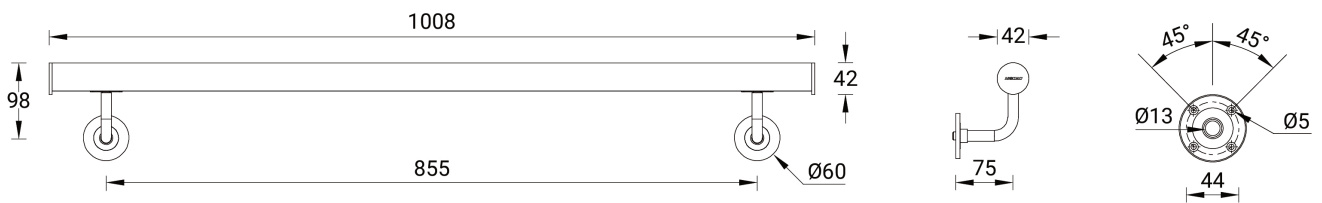

Accessories



Connector for cap rail - Straight
A30181



Connector for cap rail - Flush elbow 90°
A30281



Connector for cap rail - Adjustable flush angle, 135° downwards
A30481



Connector for cap rail - Adjustable flush angle, 135° upwards
A30381



End cap for cap rail
A30581



Wall bracket
A30681



DALI Control System
Control-DALI



Driver (CV) - PWM - 100 W - IP65 - 24 V
A33191-PW

MALTA 1 (MAT-30002) (Version 1)

Driver (CV) - PWM - 150 W - IP65
- 24 V
A33291-PW



Driver (CV) - PWM - 250 W - IP65
- 24 V
A33391-PW



Driver (CV) - PWM - 320 W - IP65
- 24 V
A33491-PW



Constant voltage dimmer - 4
Channel
A610291
