

MALTA 1 (MAT-30003) (Version 1)



Product description

Without remote driver - Constant voltage (CV) 24 V -
Stainless steel - IP65 - RGBW



Luminaire Structure

- | | | |
|--|--|---|
| <ul style="list-style-type: none"> - Aluminium or stainless steel body - Single cable entry - One cable gland supplied with 1 m of 5x0.5 sqmm outdoor cable - Stainless steel fasteners in grade 304 with zinc flake coating (ZFC) | <ul style="list-style-type: none"> - Durable silicone rubber gasket - High-efficiency PMMA lens - Remote driver (not included) - Standard unit length is 1 m, different lengths are available upon request | <ul style="list-style-type: none"> - All handrails and components are delivered completely pre-assembled for on-site installation - LIGMAN prepares project handrail solutions according to layout drawings, elevations and project's brief; offering an end-to-end solution from concept through to implementation |
|--|--|---|

Optic



G

Product colour



00 - Stainless Steel

MALTA 1 (MAT-30003) (Version 1)


Technical information

Material	Stainless Steel
Light source	84 LED/m
Power	15 W
Lumen	365 - 373 lm
Efficacy	24 - 25 lm/W
Driver option	Remote driver (not included)
Driver	Constant voltage (CV)
Input voltage	24 VDC

Optic	G
Optic value	60°x111°
CCT / CRI	RGBW30, RGBW40
Bug	B0-U0-G0
ULR	0%
ULOR	0%
CIE flux code n°3	98
Dimming type	DMX, DMX/RDM

Product colours	Stainless Steel
Weight	3.5 kg/m
Operating temperature	-20 °C to 40 °C
Cable	One cable gland supplied with 1 m of 5x0.5 sqmm outdoor cable
Through wiring	Single cable entry
Lens / Reflector / Optic	High-efficiency PMMA lens

MAT-30003

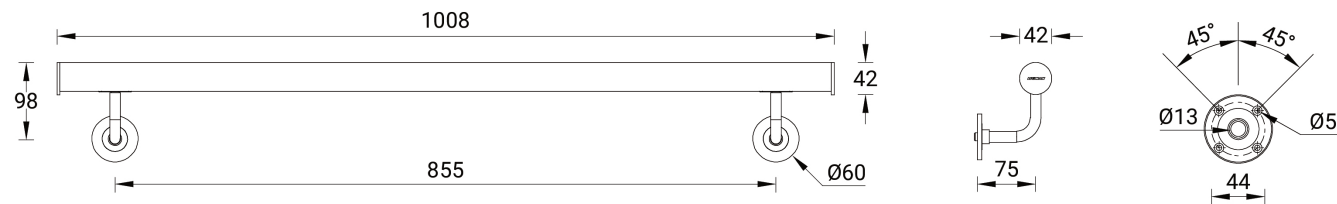

Accessories



Connector for cap rail - Straight
A30181



Connector for cap rail - Flush elbow 90°
A30281



Connector for cap rail - Adjustable flush angle, 135° downwards
A30481



Connector for cap rail - Adjustable flush angle, 135° upwards
A30381



End cap for cap rail
A30581



Wall bracket
A30681



DMX Control System
Control-DMX



DMX/RDM Control System
Control-DMX-RDM

MALTA 1 (MAT-30003) (Version 1)



Driver (CV) - PWM - 100 W - IP65
- 24 V
A33191-PW



Driver (CV) - PWM - 150 W - IP65
- 24 V
A33291-PW



Driver (CV) - PWM - 250 W - IP65
- 24 V
A33391-PW



Driver (CV) - PWM - 320 W - IP65
- 24 V
A33491-PW



Constant voltage dimmer - 4
Channel
A610291