

MARVEL 3 (MAV-20005)



Product description


Ø76 mm - Supplied with specific 2.5 m cylindrical, straight aluminium pole: APD125076-MARVEL - Optic 360°




Luminaire Structure

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass
- Integral control gear

Product colour

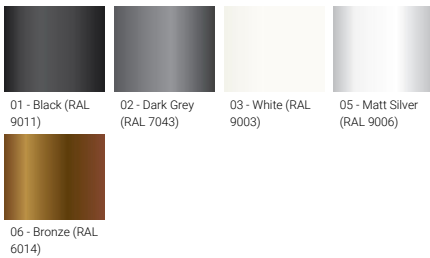


Special finishes upon request

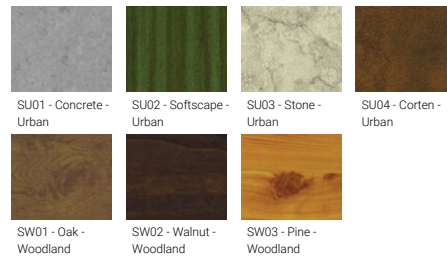

MARVEL 3 (MAV-20005)

Technical information

Material	Aluminium	Input voltage	220-240 V 50/60 Hz	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	
Light source	24 LED	Optic value	360°		Weight	8.0 kg
Power	34 W	CCT / CRI	3000K CRI80, 4000K CRI80		Operating temperature	-20 °C to 40 °C
Lumen	2591 - 3321 lm	Bug	B1-U2-G1, B2-U2-G1		Cable	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
Efficacy	76 - 98 lm/W	ULR	1.24%, 1.92%		Through wiring	Single cable entry
Driver option	Integral control gear	ULOR	1.24%, 1.92%		Lens / Reflector / Optic	High-efficiency PMMA lens, Clear toughened glass
Driver	Constant current (CC)	CIE flux code n°3	97, 98		VARIANTS	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

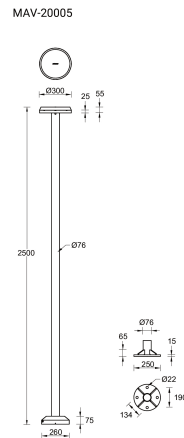

Accessories



Root mount kit
A24391