

**MELBOURNE 6 (MEL-60052)**



**Product description**


Ø215 - With recessing box / driver - RGBW - Adjustable: Tilt 25° / Rotation 360°



**Luminaire Structure**

- Die-cast stainless steel in grade 316
- Body is pre-treated before powder coating ensuring high corrosion resistance
- Front ring in grade 316 stainless steel
- Externally adjustable: Tilt 25°, Rotation 360° for MEL-60051, MEL-60052, MEL-60053, MEL-60061, MEL-60062, MEL-60063
- Single cable entry, through wiring upon request
- One cable gland supplied with 1 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear, 15mm thick, toughened glass
- Integral control gear
- Recessing box in high-density polyethylene is included
- Suitable for drive-over with a maximum load of 5000 kg
- Vehicles with pneumatic tires can drive over the luminaire but the speed must not exceed 50 km/h
- Load is transferred by the housing to the foundation
- One glass suction cup for easy installation is included in each item list on the order
- The distance between the luminaire and the illuminated surface should be at least 0.5 m

**Optic**



**Product colour**




**MELBOURNE 6 (MEL-60052)**

**Technical information**

|                      |                       |
|----------------------|-----------------------|
| <b>Material</b>      | Stainless Steel       |
| <b>Light source</b>  | 1 LED                 |
| <b>Power</b>         | 11 W                  |
| <b>Lumen</b>         | 313 - 395 lm          |
| <b>Efficacy</b>      | 28 - 36 lm/W          |
| <b>Driver option</b> | Integral control gear |
| <b>Driver</b>        | Constant current (CC) |


|                      |                  |
|----------------------|------------------|
| <b>Input voltage</b> | 220-240V 50/60Hz |
| <b>Optic</b>         | N, W             |
| <b>Optic value</b>   | 12°, 37°         |
| <b>CCT / CRI</b>     | RGBW30, RGBW40   |
| <b>Bug</b>           | B0-U3-G0         |
| <b>ULR</b>           | 100              |
| <b>ULOR</b>          | 100              |

|                                |   |
|--------------------------------|---|
| <b>Dimming type</b>            | DMX, DMX/RDM  |
| <b>Product colours</b>         | Stainless Steel   |
| <b>Weight</b>                  | 11.0 kg   |
| <b>Operating temperature</b>   | -20 °C to 50 °C   |
| <b>Cable</b>                   | One cable gland supplied with 1 m of 3x1.0 sqmm outdoor cable   |
| <b>Through wiring</b>          | Single cable entry, through wiring upon request   |
| <b>Variants (DMX, DMX/RDM)</b> | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |

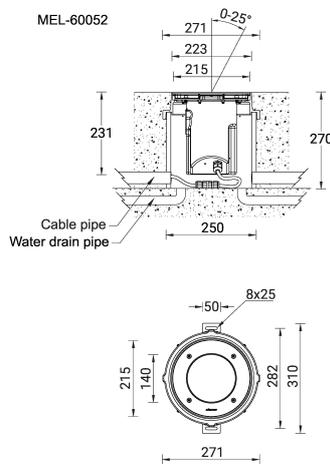

**MELBOURNE 6 (MEL-60052)****Accessory**

DMX Control System  
**Control-DMX**



Honeycomb louvre  
**A62421**



Anti slip glass  
**A62112**



Glass suction cup  
**A614491**



DMX/RDM Control System  
**Control-DMX-RDM**

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.