


MIC 2 (MI-50415)



Product description

Small



Luminaire Structure

- Die-cast aluminium housing with a chemical chromatised protection before powder coating, ensuring high corrosion resistance
- Single cable entry
- Through wiring on request

- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket
- High-efficiency PMMA lens


- Clear toughened glass
- Integral control gear

Optic




VN

Product colour

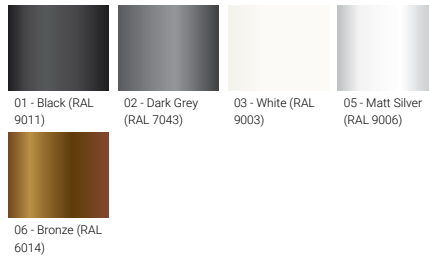

Special finishes upon request

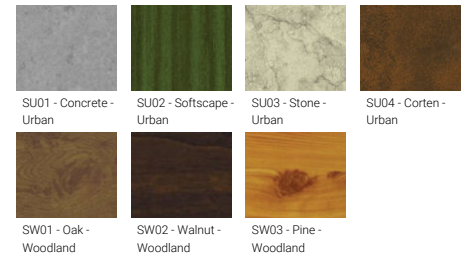


MIC 2 (MI-50415)

Technical information

Material	Aluminium	Optic	VN	Lens / Reflector / Optic	High-efficiency PMMA lens, Clear toughened glass	
Light source	3 LED	Optic value	8°	MacAdam Ellipse	3 SDCM	
Power	21 W	CCT / CRI	3000K CRI80, 4000K CRI80	Lifetime L90B10 (hours)	> 109,000	
Lumen	1527 - 1798 lm	Dimming type	On/Off, 1-10V, DALI	Lifetime L80B10 (hours)	> 109,000	
Efficacy	73 - 86 lm/W	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Lifetime L80B50 (hours)	> 109,000	
Driver option	Integral control gear			Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)	
Driver	Constant current (CC)					
Input voltage	220-240 V 50/60 Hz	Weight	2.9 kg			
		Operating temperature	-20 °C to 40 °C			
		Through wiring	Single cable entry			

MI-50415

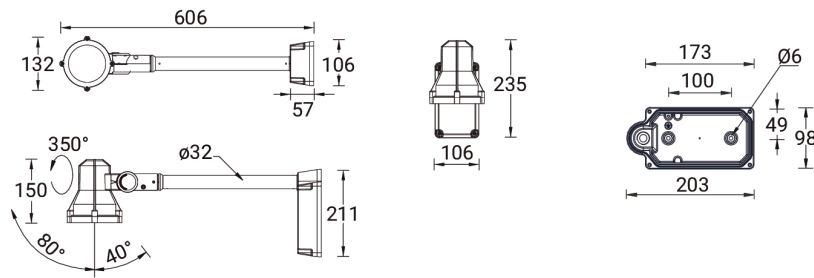

Accessories



Anti-glare visor
A50131



Anti-glare hood
A51531

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.