


MUNSTER 1 (MUS-95011)



Product description

Ø80x150 mm

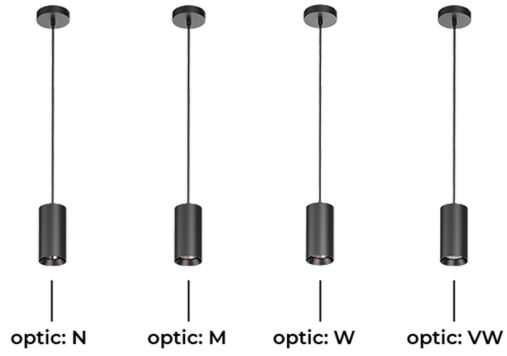


Luminaire Structure

- Die-cast aluminium housing
- With powder coating


- High-efficiency optical reflector
- Integral control gear

- 3 phase adapter for track mounting


Optic



Product colour



Special finishes upon request

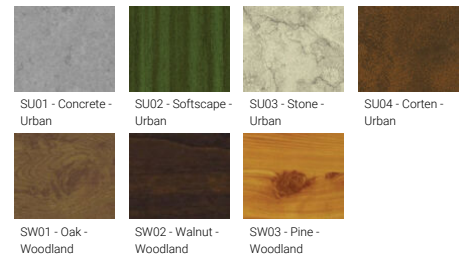

MUNSTER 1 (MUS-95011)

Technical information

| | | | | | |
|----------------------|-----------------------|----------------------|--------------------------|---------------------------------|--|
| Material | Aluminium | Driver | Constant current (CC) | ULOR | 0% |
| Light source | 1 LED | Input voltage | 220-240 V 50/60 Hz | CIE flux code n°3 | 99 |
| Power | 18 W | Optic | N, M, W, VW | Dimming type | On/Off |
| Lumen | 1615 - 1804 lm | Optic value | 12°, 24°, 38°, 54° | Product colours | Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| Efficacy | 85 - 95 lm/W | CCT / CRI | 3000K CRI90, 4000K CRI90 | | Operating temperature |
| Driver option | Integral control gear | ULR | 0% | Lens / Reflector / Optic | High-efficiency optical reflector |

MUS-95011

