

NIKON 3 (NI-80525-S)**Product description**

With remote box IP-rated / remote driver - Round -
Stainless steel frame

**Luminaire Structure**

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- 6 mm thick front ring in stainless steel or aluminium
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (included)

Optic

VN

Product colour


00 - Stainless Steel

NIKON 3 (NI-80525-S)


Technical information

Material	Stainless Steel	Optic value	8°	Operating temperature	-20 °C to 50 °C
Light source	7 LED	CCT / CRI	3000K CRI80, 4000K CRI80	Through wiring	Single cable entry
Power	33 W	Bug	B3-U1-G0	Lens / Reflector / Optic	Clear toughened glass
Lumen	3091 - 3320 lm	ULR	0%	MacAdam Ellipse	3 SDCM
Efficacy	94 - 101 lm/W	ULOR	0%	Lifetime L90B10 (hours)	> 109,000
Driver option	Remote driver (included)	CIE flux code n°3	100	Lifetime L80B10 (hours)	> 109,000
Driver	Constant current (CC)	Dimming type	On/Off, 1-10V, DALI	Lifetime L80B50 (hours)	> 109,000
Input voltage	350 mA, 84 VDC	Product colours	Stainless Steel	Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Optic	VN	Weight	2.6 kg		

NI-80525-S

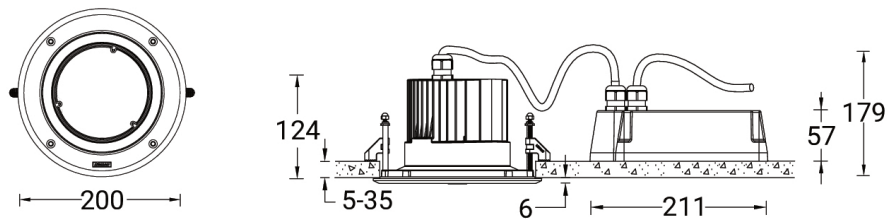

Accessories



Concrete box modification upon request
CONCRETE-BOX



DALI Control System
Control-DALI