

NORDSTROM 3 (NOD-50022)



Product description

Integral control gear - 120x120 mm - Class I - RGBW




Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Thermal heat dissipation body
- Single cable entry


- One IP68 connector supplied with 0.2 m of 8x0.5 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens

- Clear toughened glass
- Integral control gear


Optic

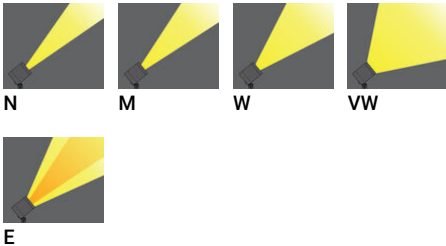

Product colour

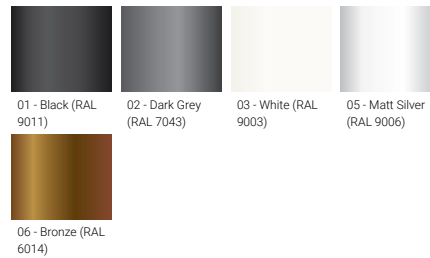

Special finishes upon request

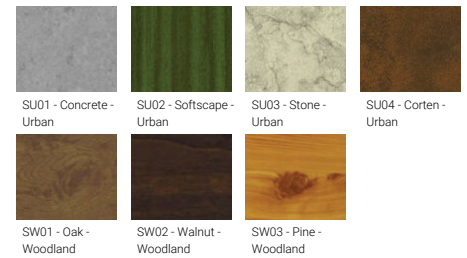


NORDSTROM 3 (NOD-50022)

Technical information

Material	Aluminium	Input voltage	220-240 V 50/60 Hz	Operating temperature	-20 °C to 40 °C
Light source	9 LED	Optic	N, M, W, VW, E	Cable	One IP68 connector supplied with 0.2 m of 8x0.5 sqmm outdoor cable
Power	22 W	Optic value	8°, 17°, 26°, 65°, 43°x11°	Through wiring	Single cable entry
Lumen	853 - 1133 lm	CCT / CRI	RGBW30, RGBW40	Lens / Reflector / Optic	High-efficiency PMMA lens, Clear toughened glass
Efficacy	39 - 52 lm/W	Dimming type	DMX, DMX/RDM	Variants (DMX/RDM)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Driver option	Integral control gear	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland		
Driver	Constant current (CC)	Weight	2.7 kg		

NOD-50022

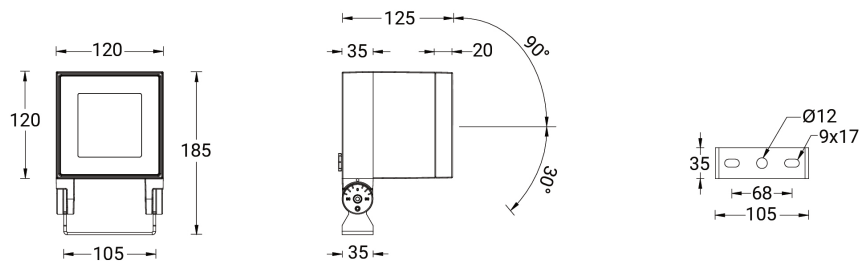

Accessories




DMX Control System
Control-DMX




DMX/RDM Control System
Control-DMX-RDM



Ground spike
A50441

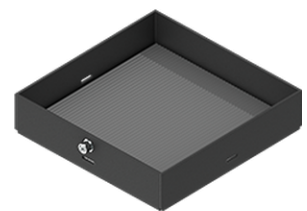

Linear spread lens
A51314

NORDSTROM 3 (NOD-50022)

Honeycomb louvre
A52021



Anti-glare visor
A53031

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.