


NYBRO 7 (NYB-30024)



Product description

Down - 40x80 mm - 1178 mm - TW

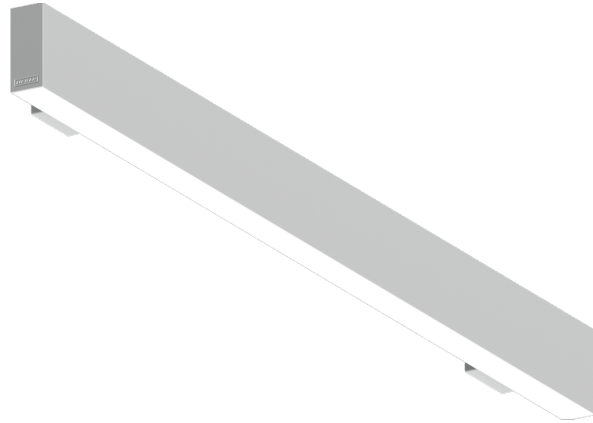

Luminaire Structure

- Die-cast aluminium end-caps and extruded aluminium profile with powder coating
- Single cable entry
- Stainless steel fasteners in grade 316
- PMMA diffuser with Opal (UGR <19) and micro prismatic (UGR <13) options for better glare control

- Up and down light distribution options
- Passive thermal management
- Integral control gear
- Wireless control available through Bluetooth connection

- Daylight and occupancy sensor options
- Emergency module (1 or 3 hours) is available upon request with 3 options (BASIC, SELF-TEST, PRO-DALI)

Optic




P

Product colour




01 - Black (RAL 9011) 03 - White (RAL 9003) 05 - Matt Silver (RAL 9006)

Special finishes upon request



SU01 - Concrete - Urban SU02 - Softscape - Urban SU03 - Stone - Urban SU04 - Corten - Urban




SW01 - Oak - Woodland SW02 - Walnut - Woodland SW03 - Pine - Woodland

NYBRO 7 (NYB-30024)


Technical information

| | | | | | |
|----------------------|-----------------------|--------------------------|---|--------------------------------|---|
| Material | Aluminium | Optic | O, P | Weight | 3.10 kg |
| Light source | 144 LED | CCT / CRI | TW (2700K - 6500K) | Operating temperature | -20 °C to 40 °C |
| Power | 25 W | Bug | B1-U1-G0, B1-U1-G1 | MacAdam Ellipse | 3 SDCM |
| Lumen | 2250 lm | ULR | 0% | Lifetime L90B10 (hours) | > 23,000 |
| Efficacy | 94 lm/W | ULOR | 0% | Lifetime L80B10 (hours) | > 45,000 |
| Driver option | Integral control gear | CIE flux code n°3 | 96, 98 | Lifetime L80B50 (hours) | > 50,000 |
| Driver | Constant current (CC) | Dimming type | DALI | Variants (DALI) | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |
| Input voltage | 220-240 V 50/60 Hz | Product colours | Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland | | |

NYB-30024

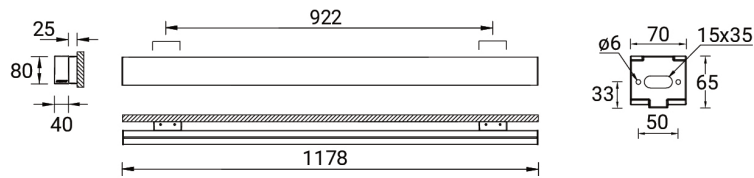

Accessories



Continuous-coupler bracket
(40/50 mm Down profile)
A81881



DALI Control System
Control-DALI