NYBRO 7 (NYB-30123)

IP20

Product description

Down (Optic) & Up (Optic 2nd) - 40x95 mm - 1178 mm
- Integrated sensor

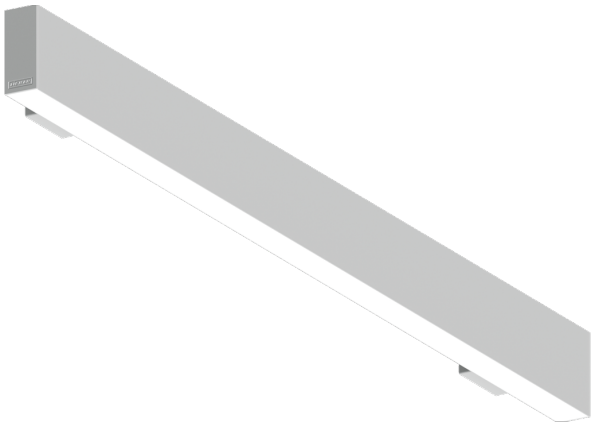

Luminaire Structure

- Die-cast aluminium end-caps and extruded aluminium profile with powder coating
- Single cable entry
- Stainless steel fasteners in grade 316
- PMMA diffuser with Opal (UGR <19) and micro prismatic (UGR <13) options for better glare control
- Up and down light distribution options
- Passive thermal management
- Integral control gear
- Wireless control available through Bluetooth connection
- Daylight and occupancy sensor options
- Emergency module (1 or 3 hours) is available upon request with 3 options (BASIC, SELF-TEST, PRO-DALI)

Optic

P / O

Product colour

01 - Black (RAL 9011) | 03 - White (RAL 9003) | 05 - Matt Silver (RAL 9006)

Special finishes upon request

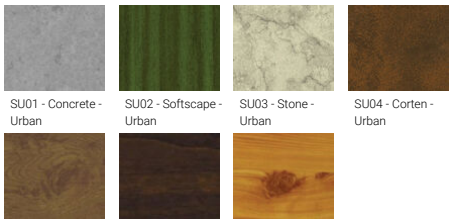

SU01 - Concrete - Urban | SU02 - Softscape - Urban | SU03 - Stone - Urban | SU04 - Corten - Urban

SW01 - Oak - Woodland | SW02 - Walnut - Woodland | SW03 - Pine - Woodland

We reserve the right to make technical and design changes.

04:45, 05-05-2024

https://www.ligman.com/nybro-7-nyb-30123/

THAILAND
LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Priao,
24150 Chachoengsao - Thailand
info@ligman.com

NYBRO 7 (NYB-30123)

Technical information

Material	Aluminium
Light source	132 & 132 LED
Power	48 W
Lumen	5270 lm
Efficacy	110 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz

Optic	O, P
Optic value	Opal, Micro-prismatic
Optic (2nd)	O
Optic (2nd) value	Opal
CCT / CRI	3000K CRI80, 4000K CRI80
Dimming type	DALI
Product colours	Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	4.80 kg

Operating temperature	-20 °C to 40 °C
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 23,000
Lifetime L80B10 (hours)	> 45,000
Lifetime L80B50 (hours)	> 50,000
Variants (DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

NYB-30123

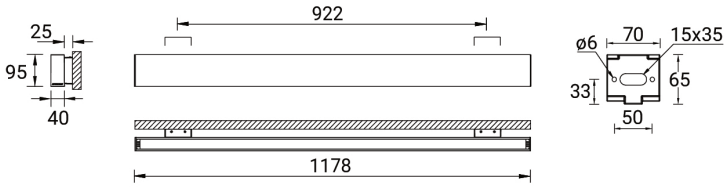

Accessories



Continuous-coupler bracket (40/50 mm Down profile)
A81881

DALI Control System
Control-DALI

THAILAND
LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Priao,
24150 Chachoengsao - Thailand
info@ligman.com