


NYBRO 8 (NYB-30325)



Product description

Down (Optic) & Up (Optic 2nd) - 60x95 mm - 1178 mm
- RGBW

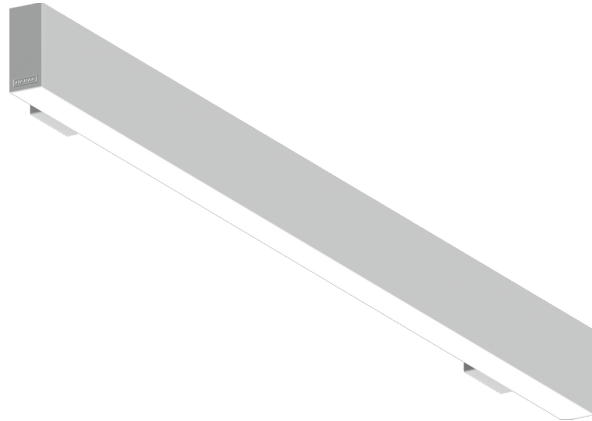

microPrim™

Luminaire Structure

- Die-cast aluminium end-caps and extruded aluminium profile with powder coating
- Passive thermal management
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)

- PMMA diffuser with Opal (UGR <19) and micro prismatic (UGR <13) options for better glare control
- Integral control gear
- Up and down light distribution options
- Wireless control available through Bluetooth connection


- Daylight and occupancy sensor options
- Emergency module (1 or 3 hours) is available upon request with 3 options (BASIC, SELF-TEST, PRO-DALI)

Optic




O / O P / O

Product colour




01 - Black (RAL 9011) 03 - White (RAL 9003) 05 - Matt Silver (RAL 9006)

Special finishes upon request



SU01 - Concrete - Urban SU02 - Softscape - Urban SU03 - Stone - Urban SU04 - Corten - Urban




SW01 - Oak - Woodland SW02 - Walnut - Woodland SW03 - Pine - Woodland

NYBRO 8 (NYB-30325)

Technical information

| | | | | | |
|----------------------|-----------------------|--------------------------|-----------------------|------------------------------|--|
| Material | Aluminium | Driver | Constant current (CC) | CCT / CRI | RGBW40 |
| Light source | 192 & 176 LED | Input voltage | 220-240 V 50/60 Hz | Dimming type | Bluetooth |
| Power | 81 W | Optic | O, P | Product colours | Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| Lumen | 5566 lm | Optic value | Opal, Micro-prismatic | | |
| Efficacy | 69 lm/W | Optic (2nd) | O | | |
| Driver option | Integral control gear | Optic (2nd) value | Opal | Weight | 5.0 kg |
| | | | | Operating temperature | -20 °C to 40 °C |

NYB-30325

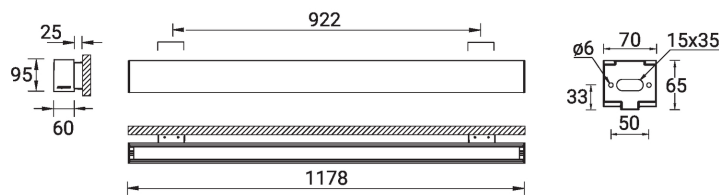

NYBRO 8 (NYB-30325)**Accessory**



Continuous-coupler bracket
(60/70 mm Down & 60 mm
Down & Up profile)
A81581



Xpress wireless switch
A90591



DALI Control System
Control-DALI
