


NYBRO 3 (NYB-80244)



Product description

Down - 40x80 mm - 1754 mm - Trimless - Tunable White

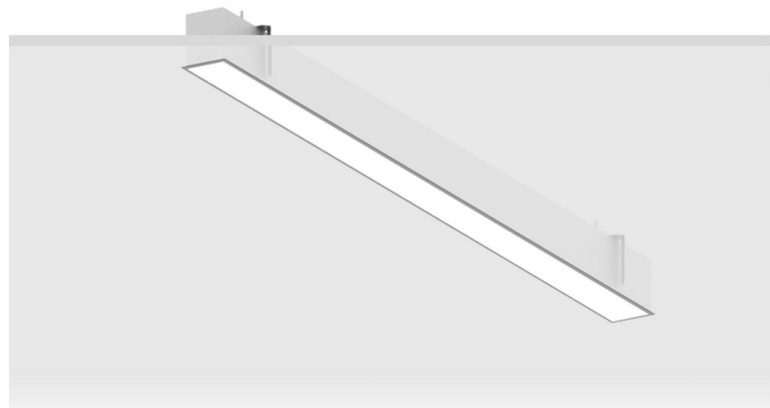

microPrim™

Luminaire Structure

- Die-cast aluminium end-caps and extruded aluminium profile with powder coating
- Passive thermal management
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- PMMA diffuser with Opal (UGR <19) and micro prismatic (UGR <13) options for better glare control

- Integral control gear
- Stainless steel brackets and screws for mounting
- Down light distribution only
- Wireless control available through Bluetooth connection

- Daylight and occupancy sensor options
- Emergency module (1 or 3 hours) is available upon request with 3 options (BASIC, SELF-TEST, PRO-DALI)


Optic



Product colour



Special finishes upon request

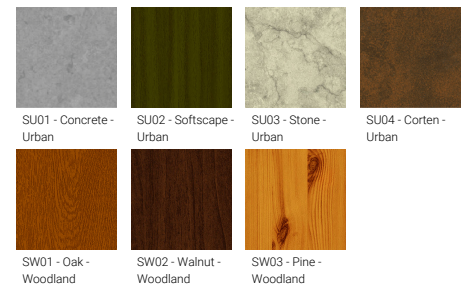


NYBRO 3 (NYB-80244)

Technical information

Material	Aluminium	Input voltage	220-240 V 50/60 Hz	Dimming type	DALI
Light source	216 LED	Optic	O, P	Product colours	Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Power	38 W	CCT / CRI	TW (2700K - 6500K)		
Lumen	3385 lm	Bug	B2-U1-G1		
Efficacy	91 lm/W	ULR	0%	Weight	4.4 kg
Driver option	Integral control gear	ULOR	0%	Operating temperature	-20 °C to 40 °C
Driver	Constant current (CC)	CIE flux code n°3	96, 98	Variants (DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

NYB-80244



NYBRO 3 (NYB-80244)**Accessory**



Continuous-coupler bracket
(40/50 mm Down profile)
A81881
