


NYBRO 10 (NYB-90302)



Product description

Down (Optic) & Up (Optic 2nd) - 60x95 mm - 602 mm

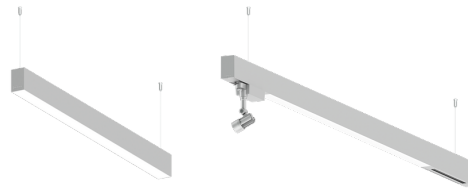

Luminaire Structure

- Die-cast aluminium end-caps and extruded aluminium profile with powder coating
- Stainless steel fasteners in grade 316
- Single cable entry
- Suspension kit is stainless steel 304 grade, adjustable, suspension (1.5 m) complete with electrical wires in white for mounting
- PMMA diffuser with Opal (UGR <19) and micro prismatic (UGR <13) options for better glare control

- Durable silicone rubber gasket
- Up and downlight distribution options
- Passive thermal management
- Integral control gear
- Wireless control available through Bluetooth connection

- Daylight and occupancy sensor options
- Emergency module (1 or 3 hours) is available upon request with 3 options (BASIC, SELF-TEST, PRO-DALI)
- Track can be integrated into NYBRO products upon request and upon receipt of design drawings

Optic




P / O

Product colour



01 - Black (RAL 9011) 03 - White (RAL 9003) 05 - Matt Silver (RAL 9006)

Special finishes upon request



SU01 - Concrete - Urban SU02 - Softscape - Urban SU03 - Stone - Urban SU04 - Corten - Urban




SW01 - Oak - Woodland SW02 - Walnut - Woodland SW03 - Pine - Woodland

NYBRO 10 (NYB-90302)

Technical information

| | | | | | |
|----------------------|-----------------------|--------------------------|---|--------------------------------|---|
| Material | Aluminium | Optic | O, P | Operating temperature | -20 °C to 40 °C |
| Light source | 72 & 60 LED | Optic value | Opal, Micro-prismatic | MacAdam Ellipse | 3 SDCM |
| Power | 39 W | Optic (2nd) | 0 | Lifetime L90B10 (hours) | > 23,000 |
| Lumen | 3974 - 4480 lm | Optic (2nd) value | Opal | Lifetime L80B10 (hours) | > 45,000 |
| Efficacy | 102 - 115 lm/W | CCT / CRI | 3000K CRI80, 4000K CRI80 | Lifetime L80B50 (hours) | > 50,000 |
| Driver option | Integral control gear | Dimming type | On/Off, DALI | Variants (On/Off, DALI) | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |
| Driver | Constant current (CC) | Product colours | Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland | | |
| Input voltage | 220-240 V 50/60 Hz | Weight | 2.59 kg | | |


NYB-90302



Accessories



Continuous-coupler bracket (60/70 mm Down & 60 mm Down & Up profile)
A81581



Supply cable surface mounting box
A80981



Integrated track - 3 phase - DALI for NYBRO
A81491



Integrated track - 3 phase - On-off for NYBRO
A81391



DALI Control System
Control-DALI