


NYBRO 10 (NYB-90336)



Product description

Down (Optic) & Up (Optic 2nd) - 60x95 mm - 1466 mm
- RGBW DMX

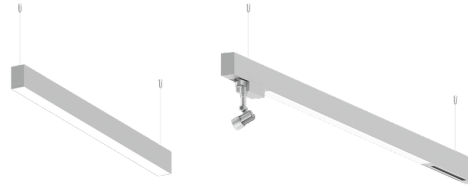

Luminaire Structure

- Die-cast aluminium end-caps and extruded aluminium profile with powder coating
- Stainless steel fasteners in grade 316
- Single cable entry
- Suspension kit is stainless steel 304 grade, adjustable, suspension (1.5 m) complete with electrical wires in white for mounting
- PMMA diffuser with Opal (UGR <19) and micro prismatic (UGR <13) options for better glare control

- Durable silicone rubber gasket
- Up and downlight distribution options
- Passive thermal management
- Integral control gear
- Wireless control available through Bluetooth connection

- Daylight and occupancy sensor options
- Emergency module (1 or 3 hours) is available upon request with 3 options (BASIC, SELF-TEST, PRO-DALI)
- Track can be integrated into NYBRO products upon request and upon receipt of design drawings

Optic



P

Product colour




01 - Black (RAL 9011)

03 - White (RAL 9003)

05 - Matt Silver (RAL 9006)

Special finishes upon request




SU01 - Concrete - Urban


SU02 - Softscape - Urban

SU03 - Stone - Urban

SU04 - Corten - Urban



SW01 - Oak - Woodland



SW02 - Walnut - Woodland




SW03 - Pine - Woodland

NYBRO 10 (NYB-90336)


Technical information

Material	Aluminium	Input voltage	220-240 V 50/60 Hz	CIE flux code n°3	96, 98
Light source	240 & 224 LED	Optic	O, P	Dimming type	DMX, DMX/RDM
Power	102 W	Optic value	Opal, Micro-prismatic	Product colours	Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Lumen	7018 lm	CCT / CRI	RGBW40		
Efficacy	94 lm/W	Bug	B1-U5-G0		
Driver option	Integral control gear	ULR	52%, 60%		
Driver	Constant current (CC)	ULOR	52%, 60%	Weight	5.71 kg
				Operating temperature	-20 °C to 40 °C
				Variants (DMX/RDM)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

NYB-90336

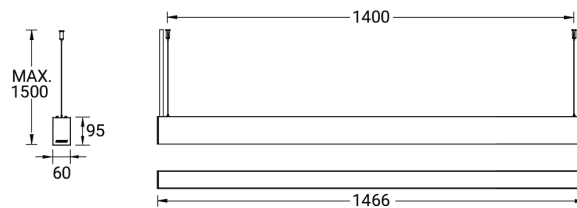

Accessories



Supply cable surface mounting box
A80981



Continuous-coupler bracket (60/70 mm Down & 60 mm Down & Up profile)
A81581



Integrated track - 3 phase - DALI for NYBRO
A81491



Integrated track - 3 phase - On-off for NYBRO
A81391



DMX Control System
Control-DMX



DMX/RDM Control System
Control-DMX-RDM