

**ODESSA 20 (OD-21057)**



**Product description**

Large - 3 projectors - 1 side - RGBW




**Luminaire Structure**

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One cable gland supplied with 2 m of 5x1.5 sqmm outdoor cable

- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass

- Integral control gear
- Maximum wind load resistance is 140 km/h


**Optic**



**Product colour**



**Special finishes upon request**

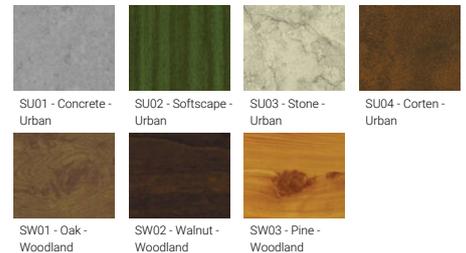

**ODESSA 20 (OD-21057)**


**Technical information**

|                      |                       |
|----------------------|-----------------------|
| <b>Material</b>      | Aluminium             |
| <b>Light source</b>  | 3 x 7 LED             |
| <b>Power</b>         | 135 W                 |
| <b>Lumen</b>         | 4110 - 5007 lm        |
| <b>Efficacy</b>      | 30 - 37 lm/W          |
| <b>Driver option</b> | Integral control gear |
| <b>Driver</b>        | Constant current (CC) |

|                        |  |
|------------------------|--|
| <b>Input voltage</b>   | 220-240 V 50/60 Hz   |
| <b>Optic</b>           | N, M, E  |
| <b>Optic value</b>     | 20°, 34°, 24° x 49°  |
| <b>CCT / CRI</b>       | RGBW30, RGBW40   |
| <b>Dimming type</b>    | DMX, DMX/RDM   |
| <b>Product colours</b> | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| <b>Weight</b>          | 26 kg  |

|                                 |   |
|---------------------------------|---|
| <b>Operating temperature</b>    | -20 °C to 40 °C   |
| <b>Cable</b>                    | One cable gland supplied with 2 m of 5x1.5 sqmm outdoor cable   |
| <b>Through wiring</b>           | Single cable entry  |
| <b>Lens / Reflector / Optic</b> | High-efficiency PMMA lens, Clear toughened glass  |
| <b>Variants (DMX, DMX/RDM)</b>  | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |

**OD-21057**

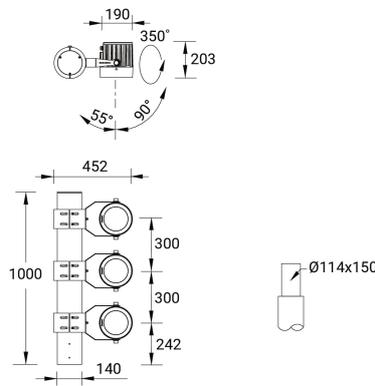

**Accessories**




Anti glare visor  
**A54431**



Anti glare louvre  
**A54631**



Linear spread lens  
**A51814**



Honeycomb louvre  
**A54121**



Remote box IP65  
**A80191**



DMX Control System  
**Control-DMX**



DMX/RDM Control System  
**Control-DMX-RDM**

**ODESSA 20** (OD-21057)

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.