

ODESSA 24 (OD-21099)



Product description

Large - Supplied with specific 8 m cylindrical, tapered galvanised steel pole: SPT180176-OD



Luminaire Structure


- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One cable gland supplied with 2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass
- Integral control gear
- Maximum wind load resistance is 160 km/h
- RGBW available upon request

Optic





VN

Product colour

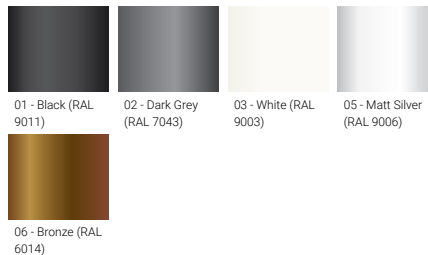

Special finishes upon request

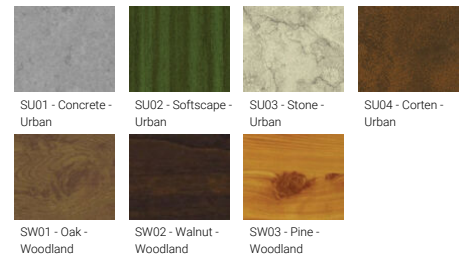


ODESSA 24 (OD-21099)


Honeycomb louvre
A54121



Root mount kit
A21191



Illuminated Beacon-Tip (White
CCT or Single Colour)
A21381



Illuminated Beacon-Tip (RGBW)
A21481

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.