

**ODESSA 1 (OD-30002)**



**Product description**

Small




**Luminaire Structure**

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable

- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass

- Integral control gear

**Optic**



VN

**Product colour**




- 01 - Black (RAL 9011)
- 02 - Dark Grey (RAL 7043)
- 03 - White (RAL 9003)
- 05 - Matt Silver (RAL 9006)



- 06 - Bronze (RAL 6014)

**Special finishes upon request**



- SU01 - Concrete - Urban
- SU02 - Softscape - Urban
- SU03 - Stone - Urban
- SU04 - Corten - Urban



- SW01 - Oak - Woodland
- SW02 - Walnut - Woodland
- SW03 - Pine - Woodland

**ODESSA 1 (OD-30002)**


**Technical information**

<b>Material</b>	Aluminium
<b>Light source</b>	3 x 1 LED
<b>Power</b>	33 W
<b>Lumen</b>	2082 - 2448 lm
<b>Efficacy</b>	63 - 74 lm/W
<b>Driver option</b>	Integral control gear
<b>Driver</b>	Constant current (CC)
<b>Input voltage</b>	220-240 V 50/60 Hz
<b>Optic</b>	VN

<b>Optic value</b>	8°
<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80
<b>Bug</b>	B1-U0-G0
<b>ULR</b>	0%
<b>ULOR</b>	0%
<b>CIE flux code n°3</b>	100
<b>Dimming type</b>	On/Off, 1-10V, DALI
<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Weight</b>	7.3 kg

<b>Operating temperature</b>	-20 °C to 40 °C
<b>Cable</b>	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
<b>Through wiring</b>	Single cable entry
<b>Lens / Reflector / Optic</b>	High-efficiency PMMA lens, Clear toughened glass
<b>MacAdam Ellipse</b>	3 SDCM
<b>Lifetime L90B10 (hours)</b>	> 109,000
<b>Lifetime L80B10 (hours)</b>	> 109,000
<b>Lifetime L80B50 (hours)</b>	> 109,000
<b>Variants (On/Off, 1-10V, DALI)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (ZO)

OD-30002

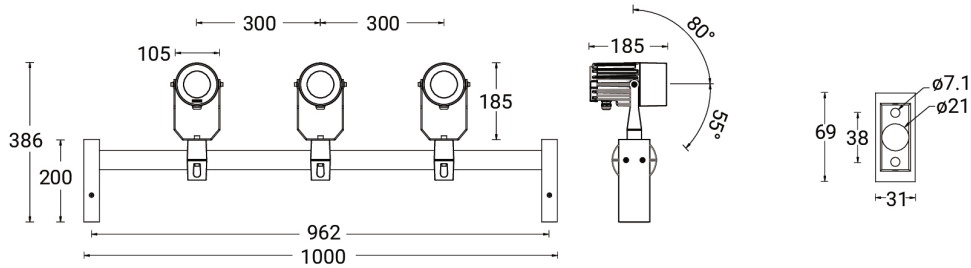

**Accessories**



Anti-glare visor  
**A80331**



Linear spread lens  
**A80214**



Honeycomb louvre  
**A80121**



DALI Control System  
**Control-DALI**

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.