

ODESSA 18 (OD-80034)



Product description

Large - RGBW



Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry, through wiring upon request

- One cable gland supplied with 0.2 m of 5x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket


- Clear toughened glass
- Integral control gear

Optic




N M E

Product colour

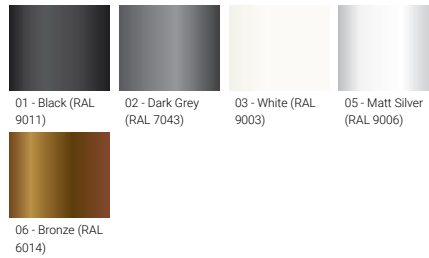

Special finishes upon request

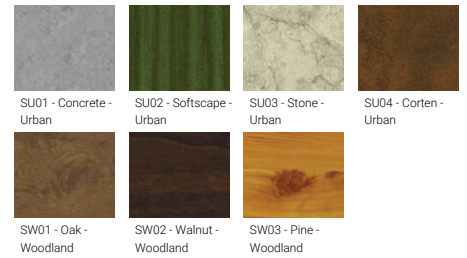

ODESSA 18 (OD-80034)


Technical information

Material	Aluminium
Light source	7 LED
Power	45 W
Lumen	1370 - 1669 lm
Efficacy	30 - 37 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz

Optic	N, M, E
Optic value	20°, 34°, 24° x 49°
CCT / CRI	RGBW30, RGBW40, RGBW65
Dimming type	DMX, DMX/RDM
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	6.4 kg
Operating temperature	-20 °C to 40 °C
Cable	One cable gland supplied with 0.2 m of 5x1.0 sqmm outdoor cable

Through wiring	Single cable entry, through wiring upon request
Lens / Reflector / Optic	Clear toughened glass
MacAdam Ellipse	7 SDCM
Lifetime L90B10 (hours)	> 15,000
Lifetime L80B10 (hours)	> 31,000
Lifetime L80B50 (hours)	> 34,000

OD-80034

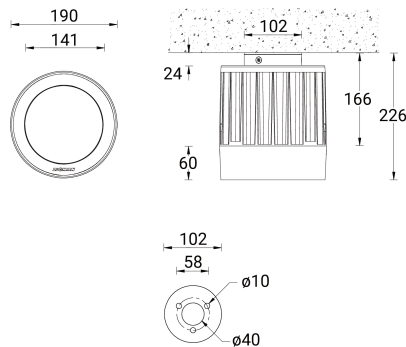

Accessories




Anti glare visor
A54431



Anti glare louvre
A54631



Linear spread lens
A51814



Honeycomb louvre
A54121

ODESSA 18 (OD-80034)

Remote box IP65
A80191



DMX Control System
Control-DMX



DMX/RDM Control System
Control-DMX-RDM

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.