


**OREGON 1** (OR-60896) (Version 1)**Product description**

Without remote driver - With recessing box - Constant voltage (CV) 24 V - RGBW

**Luminaire Structure**

- Stainless steel body in grade 316
- Single cable entry
- One cable gland supplied with 2 m of 5x0.75 sqmm outdoor cable
- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (not included)
- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products
- Recessing box in high-density polyethylene is included
- Luminaire must be submerged when operational
- Maximum depth 1 m
- Outdoor cable needs to be ordered with a specific length

**Optic****M****Product colour**

00 - Stainless Steel

**OREGON 1 (OR-60896) (Version 1)**


**Technical information**

<b>Material</b>	Stainless Steel
<b>Light source</b>	1 LED
<b>Power</b>	5 W
<b>Lumen</b>	224 lm
<b>Efficacy</b>	45 lm/W
<b>Driver option</b>	Remote driver (not included)

<b>Driver</b>	Constant voltage (CV)
<b>Input voltage</b>	24 VDC
<b>Optic</b>	M
<b>Optic value</b>	33°
<b>CCT / CRI</b>	RGBW30, RGBW40
<b>Dimming type</b>	DMX, DMX/RDM

<b>Product colours</b>	Stainless Steel
<b>Weight</b>	0.6 kg
<b>Operating temperature</b>	-20 °C to 40 °C
<b>Cable</b>	One cable gland supplied with 2 m of 5x0.75 sqmm outdoor cable
<b>Through wiring</b>	Single cable entry
<b>Lens / Reflector / Optic</b>	Clear toughened glass

OR-60896

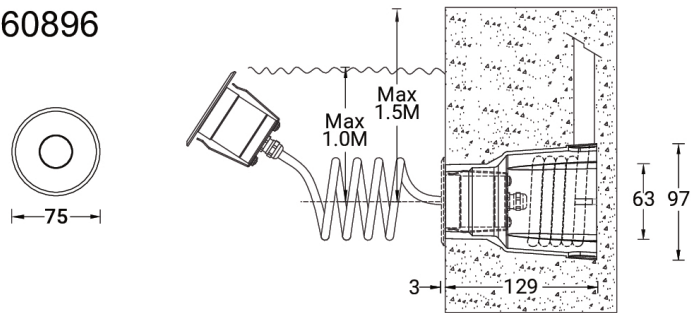

**Accessories**



DMX Control System  
**Control-DMX**



DMX/RDM Control System  
**Control-DMX-RDM**



Driver (CV) - On/Off - 36 W - IP67 - 24 V  
**A34491-ND**



Driver (CV) - On/Off - 60 W - IP67 - 24 V  
**A34591-ND**



Driver (CV) - On/Off - 100 W - IP67 - 24 V  
**A34791-ND**



Driver (CV) - On/Off - 150 W - IP67 - 24 V  
**A34891-ND**



Driver (CV) - On/Off - 200 W - IP67 - 24 V  
**A34991-ND**



Driver (CV) - On/Off - 350 W - IP67 - 24 V  
**A35091-ND**