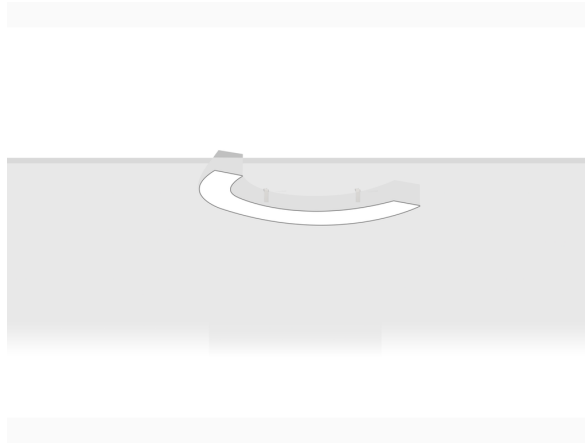



OULU 1 (OUL-80002)**Product description**




Down - 180° - R250 - TW

**Luminaire Structure**

- Integral control gear

Optic

0

Product colour01 - Black (RAL
9011)03 - White (RAL
9003)05 - Matt Silver
(RAL 9006)**Special finishes upon request**SU01 - Concrete -
UrbanSU02 - Softscape -
UrbanSU03 - Stone -
UrbanSU04 - Corten -
UrbanSW01 - Oak -
WoodlandSW02 - Walnut -
WoodlandSW03 - Pine -
Woodland

OULU 1 (OUL-80002)


Technical information

| | |
|---------------------|-----------|
| Material | Aluminium |
| Light source | 144 LED |
| Power | 13 W |
| Lumen | 1234 lm |
| Efficacy | 95 lm/W |


| | |
|----------------------|-----------------------|
| Driver option | Integral control gear |
| Driver | Constant current (CC) |
| Input voltage | 220-240 V 50/60 Hz |
| Optic | 0 |
| CCT / CRI | TW (2700K - 6500K) |

| | |
|------------------------------|---|
| Dimming type | DALI |
| Product colours | Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| Weight | 2.2 kg |
| Operating temperature | -20 °C to 40 °C |
| Variants (DALI) | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |

Oulu 250

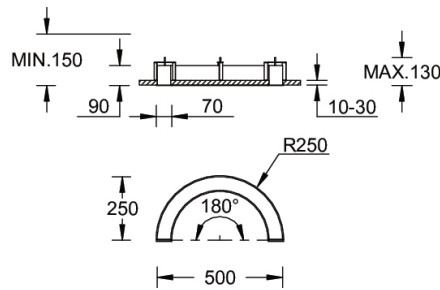

Accessories



Wireless bluetooth converter
A90291



Xpress wireless switch
A90591



DALI Control System
Control-DALI