


OULU 4 (OUL-80323)



Product description

Down - 22.5° - R2500 - RGBW

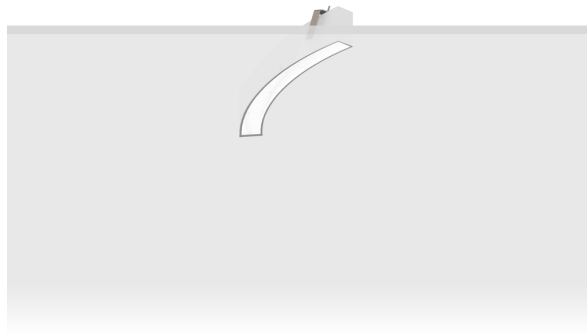


Luminaire Structure

- Extruded aluminium bended profile with powder coating
- Stainless steel fasteners in grade 316
- Stainless steel brackets and screws for mounting
- Opal PMMA diffuser (UGR <19) for glare control

- Up and down light distribution options
- Passive thermal management
- Integral control gear
- Remote driver is included for dimming type: 1-10V (-DI)

- Wireless control available through Bluetooth connection
- Daylight and occupancy sensor options

Optic




0

Product colour




01 - Black (RAL 9011) 03 - White (RAL 9003) 05 - Matt Silver (RAL 9006)

Special finishes upon request



SU01 - Concrete - Urban SU02 - Softscape - Urban SU03 - Stone - Urban SU04 - Corten - Urban





SW01 - Oak - Woodland SW02 - Walnut - Woodland SW03 - Pine - Woodland

OULU 4 (OUL-80323)

Technical information

| | | | | | |
|----------------------|-----------------------|----------------------|-----------------------|------------------------------|---|
| Material | Aluminium | Driver | Constant current (CC) | Product colours | Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| Light source | 344 LED | Input voltage | 220-240 V 50/60 Hz | Weight | 2.7 kg |
| Power | 19 W | Optic | 0 | Operating temperature | -20 °C to 40 °C |
| Lumen | 545 lm | Optic value | Opal | Variants (Bluetooth) | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |
| Efficacy | 29 lm/W | CCT / CRI | RGBW40 | | |
| Driver option | Integral control gear | Dimming type | Bluetooth | | |

OUL-80323

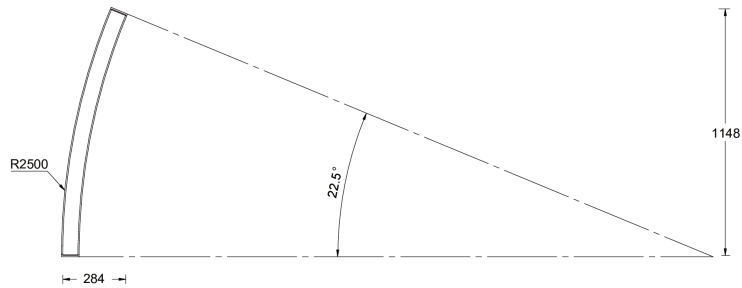

Accessories



Continuous-coupler bracket
A81781



Xpress wireless switch
A90591



DALI Control System
Control-DALI