

## OULU 7 (OUL-80921)



### Product description

Down (Optic) & Up (Optic 2nd) - 45° - R1500 - White light



### Luminaire Structure

- Die-cast aluminium end-caps and extruded aluminium bended profile with powder coating
- Multiple angles available
- Stainless steel fasteners in grade 316
- Steel brackets for ceiling down mounting option

- Opal PMMA diffuser (UGR <19) for glare control
- Up and down light distribution options
- Passive thermal management
- Integral control gear

- Remote driver is included for dimming type: 1-10V (-DI)
- Wireless control available through Bluetooth connection

### Optic



0 / 0

### Product colour




01 - Black (RAL 9011)

03 - White (RAL 9003)

05 - Matt Silver (RAL 9006)

### Special finishes upon request



SU01 - Concrete - Urban

SU02 - Softscape - Urban

SU03 - Stone - Urban


SU04 - Corten - Urban



SW01 - Oak - Woodland



SW02 - Walnut - Woodland




SW03 - Pine - Woodland

## OULU 7 (OUL-80921)

### Technical information

<b>Material</b>	Aluminium	<b>Driver</b>	Constant current (CC)	<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80
<b>Light source</b>	144 & 144 LED	<b>Input voltage</b>	220-240 V 50/60 Hz	<b>Dimming type</b>	On/Off, 1-10V, DALI
<b>Power</b>	37 W	<b>Optic</b>	0	<b>Product colours</b>	Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Lumen</b>	3643 - 3795 lm	<b>Optic value</b>	Opal		
<b>Efficacy</b>	98 - 103 lm/W	<b>Optic (2nd)</b>	0		
<b>Driver option</b>	Integral control gear for On/Off (-ND), DALI (-DA). Remote driver is included for 1-10V (-DI)	<b>Optic (2nd) value</b>	Opal	<b>Weight</b>	4.0 kg
				<b>Operating temperature</b>	-20 °C to 40 °C
				<b>Variants (On/Off, 1-10V, DALI)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)


OUL-80921

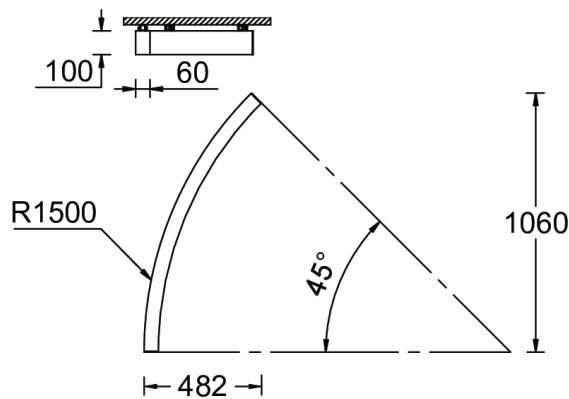

### Accessories



Continuous-coupler bracket  
**A81781**



Wireless bluetooth converter  
**A90291**



Xpress wireless switch  
**A90591**



DALI Control System  
**Control-DALI**