

OULU 7 (OUL-80931)



Product description

Down (Optic) & Up (Optic 2nd) - 45° - R2000 - White light



Luminaire Structure

- Die-cast aluminium end-caps and extruded aluminium bended profile with powder coating
- Multiple angles available
- Stainless steel fasteners in grade 316
- Steel brackets for ceiling down mounting option

- Opal PMMA diffuser (UGR <19) for glare control
- Up and down light distribution options
- Passive thermal management
- Integral control gear

- Remote driver is included for dimming type: 1-10V (-DI)
- Wireless control available through Bluetooth connection

Optic




0 / 0

Product colour



01 - Black (RAL 9011) 03 - White (RAL 9003) 05 - Matt Silver (RAL 9006)

Special finishes upon request



SU01 - Concrete - Urban SU02 - Softscape - Urban SU03 - Stone - Urban SU04 - Corten - Urban




SW01 - Oak - Woodland SW02 - Walnut - Woodland SW03 - Pine - Woodland

OULU 7 (OUL-80931)

Technical information

| | | | | | |
|----------------------|---|--------------------------|-----------------------|-------------------------------|---|
| Material | Aluminium | Driver | Constant current (CC) | CCT / CRI | 3000K CRI80, 4000K CRI80 |
| Light source | 192 & 192 LED | Input voltage | 220-240 V 50/60 Hz | Dimming type | On/Off, 1-10V, DALI |
| Power | 52 W | Optic | O | Product colours | Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| Lumen | 5229 - 5459 lm | Optic value | Opal | | |
| Efficacy | 101 - 105 lm/W | Optic (2nd) | O | | |
| Driver option | Integral control gear for On/Off (-ND), DALI (-DA). Remote driver is included for 1-10V (-DI) | Optic (2nd) value | Opal | Weight | 5.3 kg |
| | | | | Operating temperature | -20 °C to 40 °C |
| | | | | Variants (1-10V, DALI) | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |


OUL-80931

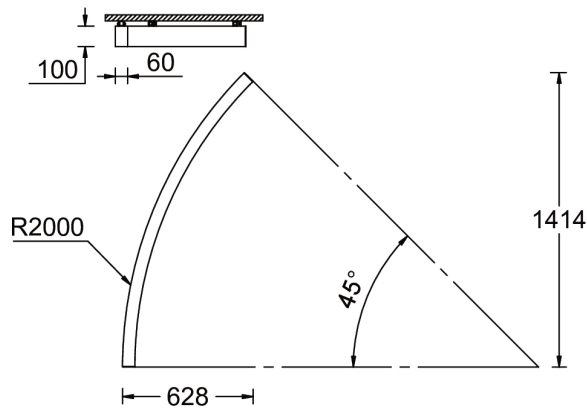

Accessories



Continuous-coupler bracket
A81781



Wireless bluetooth converter
A90291



Xpress wireless switch
A90591



DALI Control System
Control-DALI