

OULU 8 (OUL-81024)



Product description

Down - 22.5° - R2500 - RGBW DMX



Luminaire Structure

- Die-cast aluminium end-caps and extruded aluminium bended profile with powder coating
- Multiple angles available
- Stainless steel fasteners in grade 316
- Steel brackets for ceiling down mounting option

- Opal PMMA diffuser (UGR <19) for glare control
- Up and down light distribution options
- Passive thermal management
- Integral control gear

- Remote driver is included for dimming type: 1-10V (-DI)
- Wireless control available through Bluetooth connection

Optic




0

Product colour




01 - Black (RAL 9011) 03 - White (RAL 9003) 05 - Matt Silver (RAL 9006)

Special finishes upon request



SU01 - Concrete - Urban SU02 - Softscape - Urban SU03 - Stone - Urban SU04 - Corten - Urban




SW01 - Oak - Woodland SW02 - Walnut - Woodland SW03 - Pine - Woodland

OULU 8 (OUL-81024)


Technical information

Material	Aluminium	Driver	Constant current (CC)	Product colours	Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Light source	344 LED	Input voltage	220-240 V 50/60 Hz		
Power	19 W	Optic	0	Weight	2.5 kg
Lumen	545 lm	Optic value	Opal		
Efficacy	21 - 29 lm/W	CCT / CRI	RGBW40	Operating temperature	-20 °C to 40 °C
Driver option	Integral control gear	Dimming type	Bluetooth, DMX, DMX/RDM		
				Variants (Bluetooth, DMX/RDM)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

OUL-81024

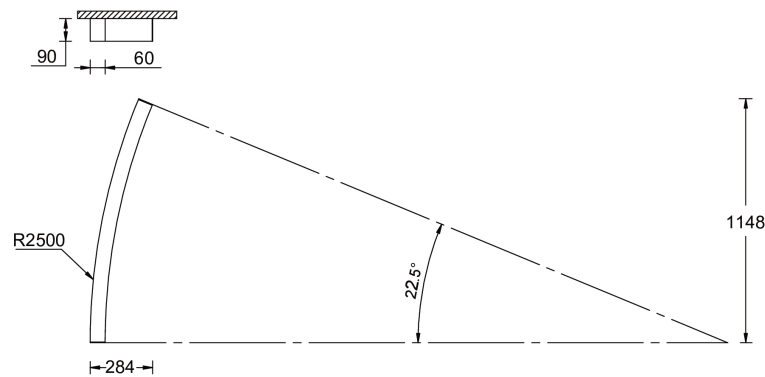

Accessories



Ceiling-mounting bracket (40 mm profile)
A81381



Continuous-coupler bracket
A81781



Recessing box
A61051



DMX Control System
Control-DMX

OULU 8 (OUL-81024)



DMX/RDM Control System

Control-DMX-RDM