

PITTSBURGH 4 (PIB-30003) (Version 1)



Product description

Small



microPrim™


Luminaire Structure

- Extruded aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Thermal heat dissipation body
- Single cable entry


- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency polycarbonate lens

- Integral control gear
- Surge protection 10kV


Optic

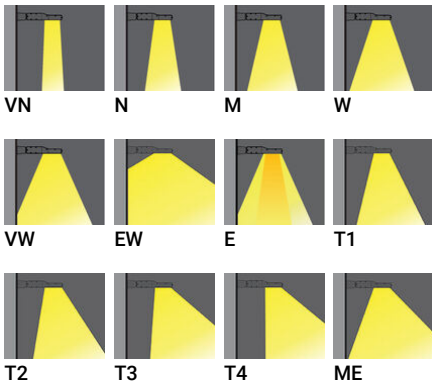

Product colour

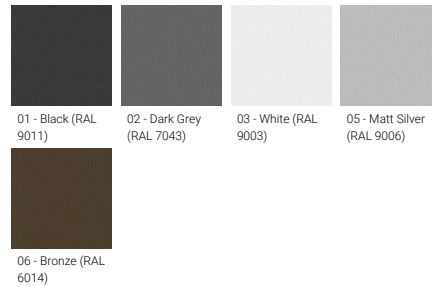

Special finishes upon request

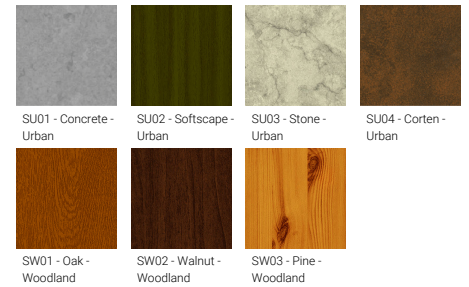

PITTSBURGH 4 (PIB-30003) (Version 1)

Technical information

Material	Aluminium	Optic	VN, N, M, W, VW, EW, E, T1, T2, T3, T4, ME	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Light source	36 LED	Optic value	5°, 12°, 25°, 53°, 65°, 106°, 94°x28°, 145°x67°, 137°x40°, 132°x32°, 94°x64°, 124°x60°	Weight	6.5 kg
Power	73 W	CCT / CRI	3000K CRI80, 4000K CRI80	Operating temperature	-20 °C to 50 °C
Lumen	6228 - 10381 lm	Bug	B1-U0-G1, B2-U0-G1, B2-U0-G2, B3-U0-G0, B3-U0-G1, B4-U0-G0, B4-U0-G1	Through wiring	Single cable entry
Efficacy	85 - 142 lm/W	ULR	<1%	Lens / Reflector / Optic	Clear toughened glass, High-efficiency polycarbonate lens
Driver option	Integral control gear	ULOR	<1%	MacAdam Ellipse	3 SDCM
Driver	Constant current (CC)	CIE flux code n°3	100, 97, 98, 99	Lifetime L90B10 (hours)	> 120,000
Input voltage	220-240V 50/60Hz	Dimming type	On/Off, 1-10V, DALI	Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

PIB-30003

