

**PITTSBURGH 4** (PIB-30005)**IP66****IK08****Product description**

---

Small - RGBW



**Luminaire Structure**

---

- Extruded aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Thermal heat dissipation body
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency polycarbonate lens
- Integral control gear
- Surge protection 10kV

**Optic**

---




**PITTSBURGH 4 (PIB-30005)**

**Technical information**

<b>Material</b>	Aluminium	<b>Driver</b>	Constant current (CC)	<b>Weight</b>	5.5 kg
<b>Light source</b>	36 LED	<b>Input voltage</b>	220-240 V 50/60 Hz	<b>Operating temperature</b>	-20 °C to 40 °C
<b>Power</b>	60 W	<b>Optic</b>	N, M, W, VW, E	<b>Through wiring</b>	Single cable entry
<b>Lumen</b>	2830 - 3622 lm	<b>Optic value</b>	9°, 16°, 33°, 64°, 43°x10°	<b>Lens / Reflector / Optic</b>	Clear toughened glass, High-efficiency polycarbonate lens
<b>Efficacy</b>	47 - 60 lm/W	<b>CCT / CRI</b>	RGBW30, RGBW40		
<b>Driver option</b>	Integral control gear	<b>Dimming type</b>	DMX/RDM		

PIB-30005

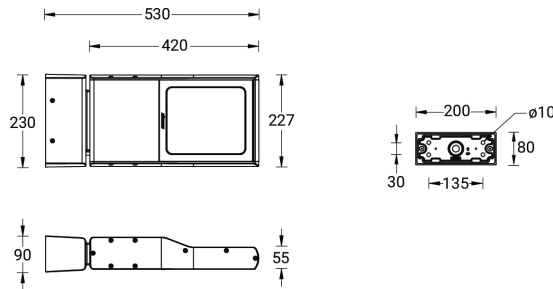

**Accessories**



DMX/RDM Control System  
Control-DMX-RDM