



PITTSBURGH 6 (PIB-30024)**IP66****IK08****Product description**

Large - RGBW

**Luminaire Structure**

- Extruded aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Thermal heat dissipation body
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency polycarbonate lens
- Integral control gear
- Surge protection 10kV

Optic

PITTSBURGH 6 (PIB-30024)


Technical information

Material	Aluminium
Light source	3 x 36 LED
Power	120 W
Lumen	5943 - 7606 lm
Efficacy	50 - 63 lm/W
Driver option	Integral control gear

Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	N, M, W, VW, E
Optic value	9°, 16°, 33°, 64°, 43°x10°
CCT / CRI	3000K CRI80, 4000K CRI80
Dimming type	DMX/RDM

Weight	16 kg
Operating temperature	-20 °C to 40 °C
Through wiring	Single cable entry
Lens / Reflector / Optic	Clear toughened glass, High-efficiency polycarbonate lens

PIB-30024

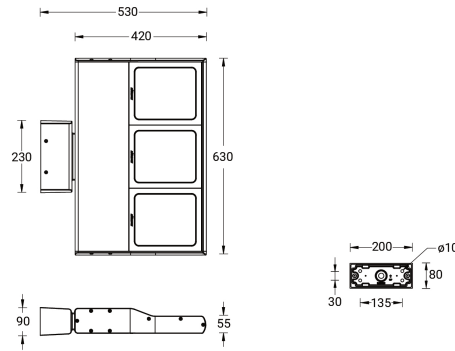

Accessories



DMX/RDM Control System
Control-DMX-RDM