

## PITTSBURGH 3 (PIB-50026)




IP66

IK08

### Product description

Large - RGBW

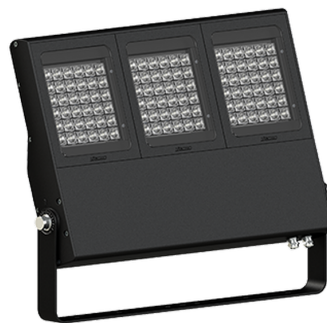

### Luminaire Structure

- Extruded aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Galvanized steel arm mounted
- Thermal heat dissipation body
- Single cable entry, through wiring upon request
- Three IP68 connectors supplied with 0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency polycarbonate lens
- Clear toughened glass
- Integral control gear
- Surge protection 10kV

### Optic



N

M

W

VW




E

## PITTSBURGH 3 (PIB-50026)

### Technical information

<b>Material</b>	Aluminium	<b>Driver</b>	Constant current (CC)	<b>Weight</b>	16 kg
<b>Light source</b>	3 x 36 LED	<b>Input voltage</b>	220-240 V 50/60 Hz	<b>Cable</b>	Three IP68 connectors supplied with 0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
<b>Power</b>	240 W	<b>Optic</b>	N, M, W, VW, E	<b>Through wiring</b>	Single cable entry, through wiring upon request
<b>Lumen</b>	10697 - 13691 lm	<b>Optic value</b>	9°, 16°, 33°, 64°, 43°x10°	<b>Lens / Reflector / Optic</b>	High-efficiency polycarbonate lens, Clear toughened glass
<b>Efficacy</b>	45 - 57 lm/W	<b>CCT / CRI</b>	RGBW30, RGBW40		
<b>Driver option</b>	Integral control gear	<b>Dimming type</b>	DMX/RDM		

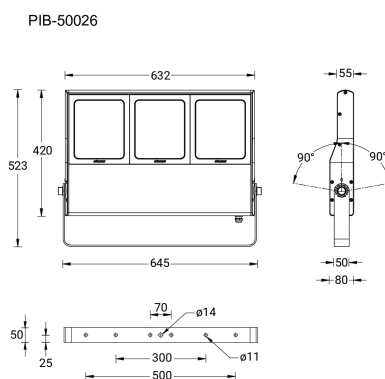

### Accessories



Anti-glare visor  
**A55131**



Anti-glare louvre  
**A55231**



DMX/RDM Control System  
**Control-DMX-RDM**

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.