

PITTSFIELD 4 (PIT-90112)



Product description

Down (Optic) & Up (Optic 2nd) - 1060 mm



Luminaire Structure

- Extruded aluminium bended profile with powder coating
- Stainless steel fasteners in grade 316
- Stainless steel, adjustable, suspension (1.5 m) complete with electrical wires in white for mounting
- PMMA diffuser with Opal (UGR <19) and micro prismatic (UGR <13) options for better glare control

- Up and down light distribution options
- Passive thermal management
- Integral control gear
- Wireless control available through Bluetooth connection

- Daylight and occupancy sensor options
- Emergency module (1 or 3 hours) is available upon request with 3 options (BASIC, SELF-TEST, PRO-DALI)

Product colour



01 - Black (RAL 9011) 03 - White (RAL 9003) 05 - Matt Silver (RAL 9006)

Special finishes upon request



SU01 - Concrete - Urban SU02 - Softscape - Urban SU03 - Stone - Urban SU04 - Corten - Urban




SW01 - Oak - Woodland SW02 - Walnut - Woodland SW03 - Pine - Woodland

PITTSFIELD 4 (PIT-90112)


Technical information

Material	Aluminium	Optic value	108°, 93°	Product colours	Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Light source	432 & 240 LED	Optic (2nd)	0		
Power	83 W	Optic (2nd) value	180°		
Lumen	9054 - 9849 lm	CCT / CRI	3000K CRI80, 4000K CRI80		
Efficacy	109 - 119 lm/W	Bug	B2-U5-G1		
Driver option	Integral control gear	ULR	36%, 38%		
Driver	Constant current (CC)	ULOR	36%, 38%		
Input voltage	220-240 V 50/60 Hz	CIE flux code n°3	96, 97		
Optic	0, P	Dimming type	On/Off, 1-10V, DALI		
					Weight
				Operating temperature	-20 °C to 40 °C
				MacAdam Ellipse	3 SDCM
				Lifetime L90B10 (hours)	> 23,000
				Lifetime L80B10 (hours)	> 45,000
				Lifetime L80B50 (hours)	> 50,000
				Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)


PIT-90112

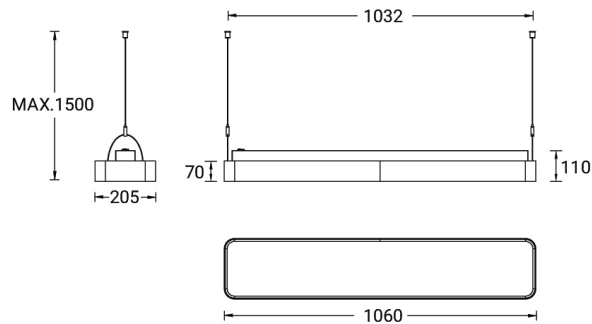


Accessories

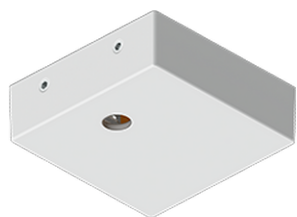


Supply cable surface mounting box
A80981



Decorative pattern - Type A for PITTSFIELD 1060 mm
A92021




Decorative pattern - Type B for PITTSFIELD 1060 mm
A93421



Decorative pattern - Type C for PITTSFIELD 1060 mm
A94821

PITTSFIELD 4 (PIT-90112)



Wireless bluetooth converter
A90291



Xpress wireless switch
A90591



DALI Control System
Control-DALI