

**PITTSFIELD 4 (PIT-90122)**



**Product description**

Down (Optic) & Up (Optic 2nd) - 1390 mm



**Luminaire Structure**

- Extruded aluminium bended profile with powder coating
- Stainless steel fasteners in grade 316
- Stainless steel, adjustable, suspension (1.5 m) complete with electrical wires in white for mounting
- PMMA diffuser with Opal (UGR <19) and micro prismatic (UGR <13) options for better glare control

- Up and down light distribution options
- Passive thermal management
- Integral control gear
- Wireless control available through Bluetooth connection


- Daylight and occupancy sensor options
- Emergency module (1 or 3 hours) is available upon request with 3 options (BASIC, SELF-TEST, PRO-DALI)

**Product colour**



01 - Black (RAL 9011)    03 - White (RAL 9003)    05 - Matt Silver (RAL 9006)

**Special finishes upon request**



SU01 - Concrete - Urban    SU02 - Softscape - Urban    SU03 - Stone - Urban    SU04 - Corten - Urban



SW01 - Oak - Woodland    SW02 - Walnut - Woodland    SW03 - Pine - Woodland

**PITTSFIELD 4 (PIT-90122)**


**Technical information**

<b>Material</b>	Aluminium
<b>Light source</b>	576 & 336 LED
<b>Power</b>	90 W
<b>Lumen</b>	10195 - 11447 lm
<b>Driver option</b>	Integral control gear
<b>Driver</b>	Constant current (CC)
<b>Input voltage</b>	220-240 V 50/60 Hz
<b>Optic</b>	O, P
<b>Optic value</b>	107°, 93°


<b>Optic (2nd)</b>	O
<b>Optic (2nd) value</b>	105°
<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80
<b>Bug</b>	B2-U5-G1
<b>ULR</b>	47%, 51%
<b>ULOR</b>	47%, 51%
<b>CIE flux code n°3</b>	96, 97
<b>Dimming type</b>	On/Off, 1-10V, DALI
<b>Product colours</b>	Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland

<b>Weight</b>	6.4 kg
<b>Operating temperature</b>	-20 °C to 40 °C
<b>MacAdam Ellipse</b>	3 SDCM
<b>Lifetime L90B10 (hours)</b>	> 23,000
<b>Lifetime L80B10 (hours)</b>	> 45,000
<b>Lifetime L80B50 (hours)</b>	> 50,000
<b>Variants (On/Off, 1-10V, DALI)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (ZO)

PIT-90122

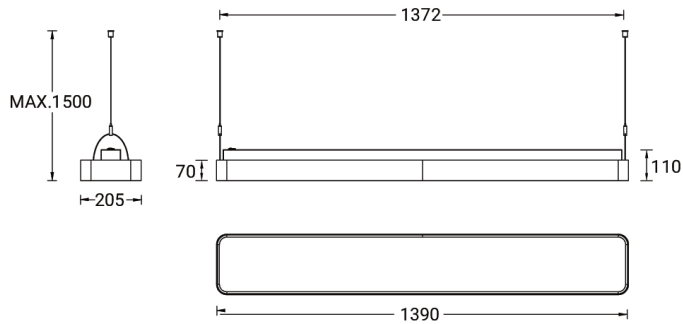


**Accessories**




Supply cable surface mounting box  
**A80981**



Decorative pattern - Type A for PITTSFIELD 1390 mm  
**A92121**




Decorative pattern - Type B for PITTSFIELD 1390 mm  
**A93521**



Decorative pattern - Type C for PITTSFIELD 1390 mm  
**A94921**

**PITTSFIELD 4 (PIT-90122)**



Wireless bluetooth converter  
**A90291**



Xpress wireless switch  
**A90591**



DALI Control System  
**Control-DALI**