

**PITTSFIELD 4 (PIT-90124)**



**Product description**

Down (Optic) & Up (Optic 2nd) - 1390 mm - RGBW Bluetooth



**Luminaire Structure**

- Extruded aluminium bended profile with powder coating
- Stainless steel fasteners in grade 316
- Stainless steel, adjustable, suspension (1.5 m) complete with electrical wires in white for mounting
- PMMA diffuser with Opal (UGR <19) and micro prismatic (UGR <13) options for better glare control

- Up and down light distribution options
- Passive thermal management
- Integral control gear
- Wireless control available through Bluetooth connection

- Daylight and occupancy sensor options
- Emergency module (1 or 3 hours) is available upon request with 3 options (BASIC, SELF-TEST, PRO-DALI)

**Product colour**



01 - Black (RAL 9011)    03 - White (RAL 9003)    05 - Matt Silver (RAL 9006)

**Special finishes upon request**



SU01 - Concrete - Urban    SU02 - Softscape - Urban    SU03 - Stone - Urban    SU04 - Corten - Urban



SW01 - Oak - Woodland    SW02 - Walnut - Woodland    SW03 - Pine - Woodland

**PITTSFIELD 4 (PIT-90124)**


**Technical information**

|                      |                       |
|----------------------|-----------------------|
| <b>Material</b>      | Aluminium             |
| <b>Light source</b>  | 2304 & 1344 LED       |
| <b>Power</b>         | 114 W                 |
| <b>Lumen</b>         | 3388 lm               |
| <b>Driver option</b> | Integral control gear |
| <b>Driver</b>        | Constant current (CC) |
| <b>Input voltage</b> | 220-240 V 50/60 Hz    |


|                          |   |
|--------------------------|---|
| <b>Optic</b>             | O, P  |
| <b>Optic value</b>       | 107°, 93°   |
| <b>Optic (2nd)</b>       | 0   |
| <b>Optic (2nd) value</b> | 105°  |
| <b>CCT / CRI</b>         | RGBW30, RGBW40  |
| <b>Dimming type</b>      | Bluetooth   |
| <b>Product colours</b>   | Black, White, Matt Silver,<br>Concrete - Urban, Softscape -<br>Urban, Stone - Urban, Corten -<br>Urban, Oak - Woodland, Walnut<br>- Woodland, Pine - Woodland |

|                                |   |
|--------------------------------|---|
| <b>Weight</b>                  | 6.4 kg  |
| <b>Operating temperature</b>   | -20 °C to 40 °C   |
| <b>MacAdam Ellipse</b>         | 3 SDCM  |
| <b>Lifetime L90B10 (hours)</b> | > 23,000  |
| <b>Lifetime L80B10 (hours)</b> | > 45,000  |
| <b>Lifetime L80B50 (hours)</b> | > 50,000  |
| <b>Variants (Bluetooth)</b>    | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |

PIT-90124

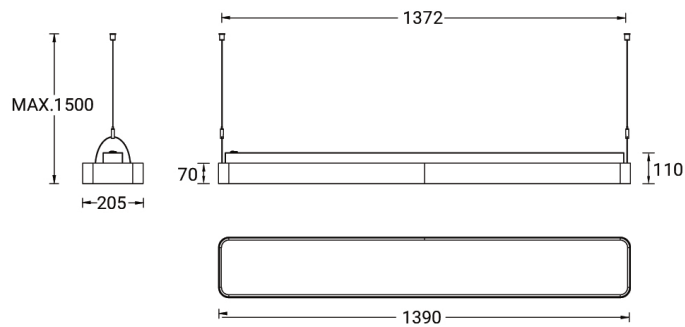


**Accessories**

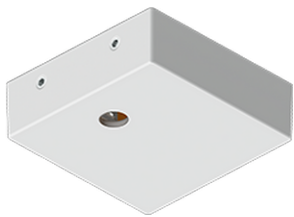


Supply cable surface mounting box  
**A80981**



Decorative pattern - Type A for PITTSFIELD 720 mm  
**A91921**



Decorative pattern - Type B for PITTSFIELD 720 mm  
**A93321**



Decorative pattern - Type C for PITTSFIELD 720 mm  
**A94721**

**PITTSFIELD 4 (PIT-90124)**



Xpress wireless switch  
**A90591**



Recessing box  
**A61051**



DALI Control System  
**Control-DALI**