

**PRAGUE 3 (PRA-10021-1MS)**



**Product description**


260x75 mm - 500 mm - With integrated motion sensor  
- 1 side




**Luminaire Structure**

- Die-cast aluminium housing and frame
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear


**Optic**

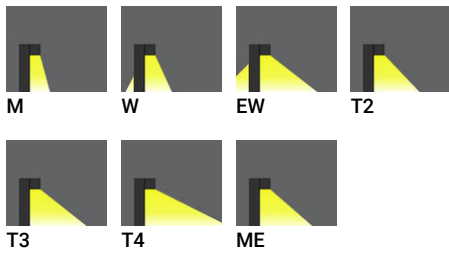

**Product colour**

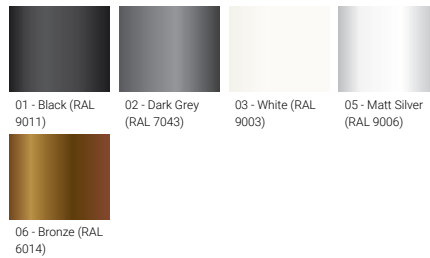

**Special finishes upon request**

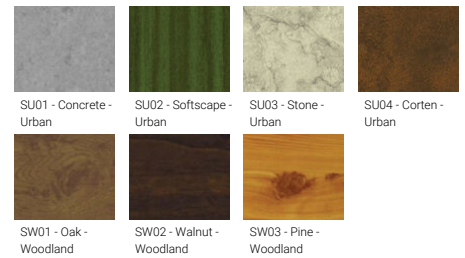

**PRAGUE 3 (PRA-10021-1MS)**

**Technical information**


<b>Material</b>	Aluminium
<b>Light source</b>	12 LED
<b>Power</b>	19.7 W
<b>Lumen</b>	2045 - 2422 lm
<b>Efficacy</b>	104 - 123 lm/W
<b>Driver option</b>	Integral control gear
<b>Driver</b>	Constant current (CC)
<b>Input voltage</b>	220-240 V 50/60 Hz
<b>Optic</b>	M, W, EW, T2, T3, T4, ME

<b>Optic value</b>	30°, 56°, 109°x102°, 137°x58°, 124°x86°, 108°x66°, 140°x62°
<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80
<b>Bug</b>	B1-U0-G0, B1-U0-G1, B2-U0-G0
<b>ULR</b>	0%
<b>ULOR</b>	0%
<b>CIE flux code n°3</b>	100, 97, 98, 99
<b>Dimming type</b>	1-10V
<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Weight</b>	7.0 kg

<b>Operating temperature</b>	-20 °C to 40 °C
<b>Cable</b>	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
<b>Through wiring</b>	Single cable entry
<b>Lens / Reflector / Optic</b>	Clear toughened glass, High-efficiency PMMA lens
<b>MacAdam Ellipse</b>	3 SDCM
<b>Lifetime L90B10 (hours)</b>	> 90,000
<b>Lifetime L80B10 (hours)</b>	> 90,000
<b>Lifetime L80B50 (hours)</b>	> 90,000

**PRAGUE**

Adjustable sensor (5 seconds - 30 minutes)  
30° - 150° Sensitivity  
Sensor detection area: 9 m

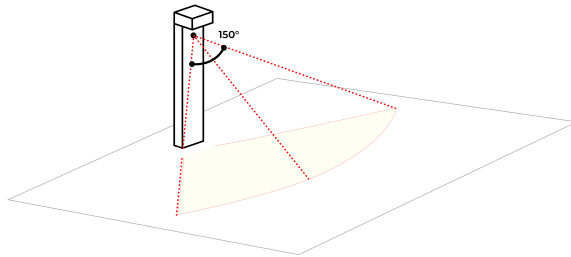

**Accessories**



Remote controller for the motion sensor - 1-10V (A14591)  
**A14291**



Anchor bolt  
**A12091**