

POWERVISION 5 (PW59-GP056)




Luminaire Structure

- Extruded aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Thermal heat dissipation body
- Single cable entry, through wiring upon request


- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass

- Integral control gear


Optic

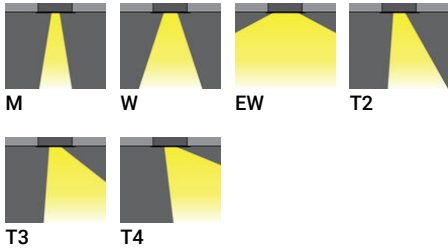

Product colour

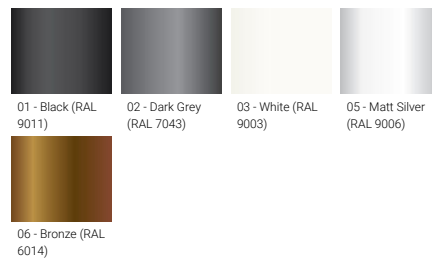

Special finishes upon request

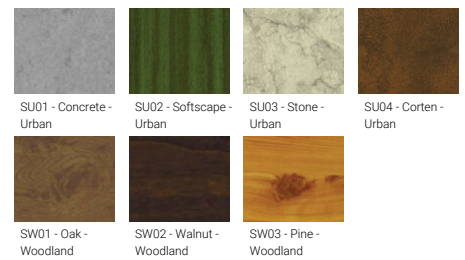

POWERVISION 5 (PW59-GP056)


Technical information

| | |
|----------------------|-----------------------|
| Material | Aluminium |
| Light source | 24 LED |
| Power | 54 W |
| Lumen | 5781 - 6655 lm |
| Efficacy | 107 - 123 lm/W |
| Driver option | Integral control gear |
| Driver | Constant current (CC) |
| Input voltage | 220-240 V 50/60 Hz |

| | |
|------------------------------|--|
| Optic | M, W, EW, T2, T3, T4 |
| Optic value | 27°, 51°, 122°, 141°x52°, 141°x69°, 99°x79° |
| CCT / CRI | 3000K CRI80, 4000K CRI80 |
| Dimming type | On/Off, DALI |
| Product colours | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| Weight | 6.5 kg |
| Operating temperature | -20 °C to 40 °C |
| Cable | One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable |

| | |
|---------------------------------|---|
| Through wiring | Single cable entry, through wiring upon request |
| Lens / Reflector / Optic | Clear toughened glass |
| MacAdam Ellipse | 3 SDCM |
| Lifetime L90B10 (hours) | > 90,000 |
| Lifetime L80B10 (hours) | > 90,000 |
| Lifetime L80B50 (hours) | > 90,000 |
| Variants (On/Off, DALI) | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |

PW59-GP056

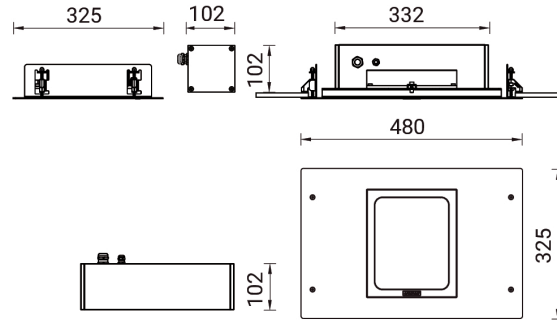

Accessories



DALI Control System
Control-DALI