

QUANTUM 2 (QA-21035)



Product description

2 sides - RGBW




Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One cable gland supplied with 0.5 m of 3x1.0 sqmm outdoor cable

- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass

- Integral control gear
- Surge protection 10kV


Optic

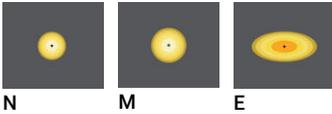

Product colour



Special finishes upon request

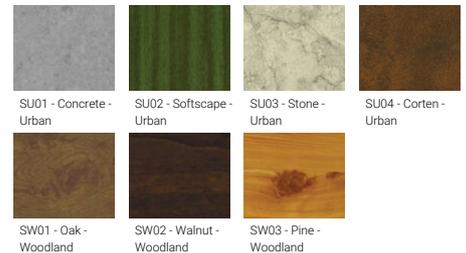


QUANTUM 2 (QA-21035)

Technical information

Material	Aluminium	Optic	N, M, E	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Light source	2 x 18 LED	Optic value	20°, 35°, 25° x 48°	Weight	20.0 kg
Power	154 W	CCT / CRI	RGBW30, RGBW40	Operating temperature	-20 °C to 40 °C
Lumen	6678 - 8592 lm	Bug	B3-U1-G0	Cable	One cable gland supplied with 0.5 m of 3x1.0 sqmm outdoor cable
Efficacy	43 - 56 lm/W	ULR	0%	Through wiring	Single cable entry
Driver option	Integral control gear	ULOR	0%	Lens / Reflector / Optic	High-efficiency PMMA lens, Clear toughened glass
Driver	Constant current (CC)	CIE flux code n°3	100	Variants (DMX/RDM)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Input voltage	220-240 V 50/60 Hz	Dimming type	DMX, DMX/RDM		

QA-21035

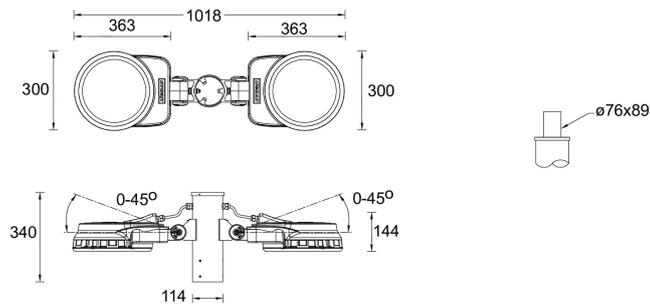

Accessories



DMX Control System
Control-DMX



DMX/RDM Control System
Control-DMX-RDM