


RADO 5 (RA-40582)



Product description

With recessing box



Luminaire Structure


- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear

Optic




G

Product colour



Special finishes upon request




RADO 5 (RA-40582)

Technical information

Material	Aluminium	Optic value	32°x88°	Operating temperature	-20 °C to 40 °C
Light source	4 x 12 LED	CCT / CRI	3000K CRI80, 4000K CRI80	Through wiring	Two cable entries for through wiring
Power	17 W	Bug	B0-U2-G1	Lens / Reflector / Optic	Clear toughened glass
Lumen	402 - 447 lm	ULR	7%	MacAdam Ellipse	3 SDCM
Efficacy	24 - 26 lm/W	ULOR	7%	Lifetime L90B10 (hours)	> 23,000
Driver option	Integral control gear	CIE flux code n°3	82	Lifetime L80B10 (hours)	> 45,000
Driver	Constant current (CC)	Dimming type	On/Off, 1-10V, DALI	Lifetime L80B50 (hours)	> 49,000
Input voltage	220-240 V 50/60 Hz	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Optic	G		Weight		

RA-40582

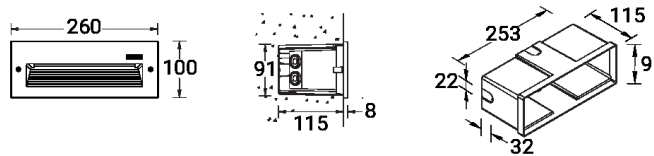

Accessories



DALI Control System
Control-DALI