


**ROBUST 3 (RO-80498-A)**



**Product description**

With remote box IP-rated / remote driver - Square - Aluminium frame

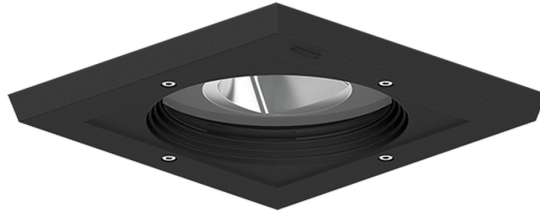

**Luminaire Structure**

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency optical reflector
- Remote driver (included)

**Optic**



AS

**Product colour**




01 - Black (RAL 9011)    02 - Dark Grey (RAL 7043)    03 - White (RAL 9003)    05 - Matt Silver (RAL 9006)



06 - Bronze (RAL 6014)

**Special finishes upon request**

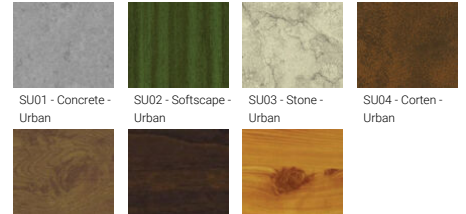

SU01 - Concrete - Urban    SU02 - Softscape - Urban    SU03 - Stone - Urban    SU04 - Corten - Urban


SW01 - Oak - Woodland    SW02 - Walnut - Woodland    SW03 - Pine - Woodland

**ROBUST 3 (RO-80498-A)**


**Technical information**

<b>Material</b>	Aluminium	<b>Optic</b>	AS	<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	
<b>Light source</b>	1 COB	<b>Optic value</b>	46°x 56°			
<b>Power</b>	42 W	<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80			
<b>Lumen</b>	3377 - 3418 lm	<b>Bug</b>	B2-U0-G0			
<b>Efficacy</b>	80 - 81 lm/W	<b>ULR</b>	0%			
<b>Driver option</b>	Remote driver (included)	<b>ULOR</b>	0%			
<b>Driver</b>	Constant current (CC)	<b>CIE flux code n°3</b>	99			
<b>Input voltage</b>	1050 mA, 36 VDC	<b>Dimming type</b>	On/Off, DALI			
					<b>Weight</b>	5.5 kg
					<b>Operating temperature</b>	-20 °C to 40 °C
				<b>Through wiring</b>	Single cable entry	
				<b>Lens / Reflector / Optic</b>	Clear toughened glass, High-efficiency optical reflector	
				<b>MacAdam Ellipse</b>	3 SDCM	
				<b>Lifetime L90B10 (hours)</b>	> 55,000	
				<b>Variants (DALI)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)	

**RO-80498-A**

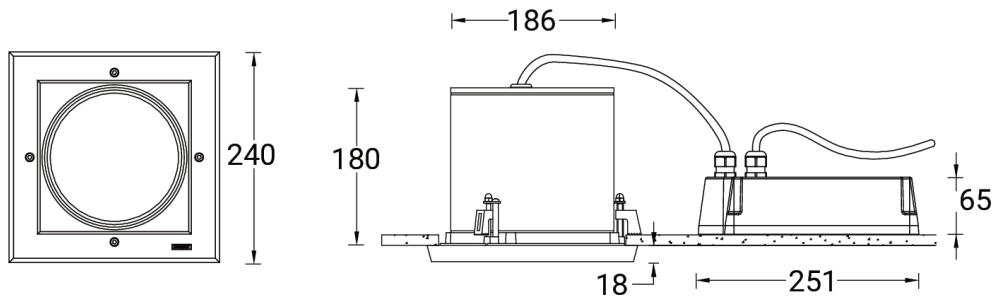

**Accessories**



Concrete box modification upon request  
**CONCRETE-BOX**



DALI Control System  
**Control-DALI**