

SANDY 2 (SA-31481) (Version 2)



Product description

Small



microPrim™

Luminaire structure


- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal UV-stabilised polycarbonate diffuser
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible

Optic





G

Product colour

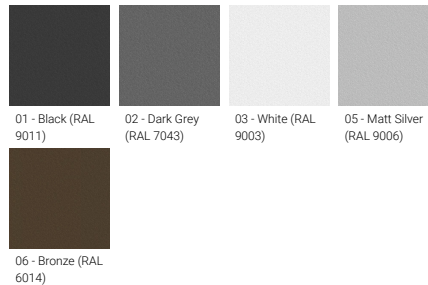

Special finishes upon request

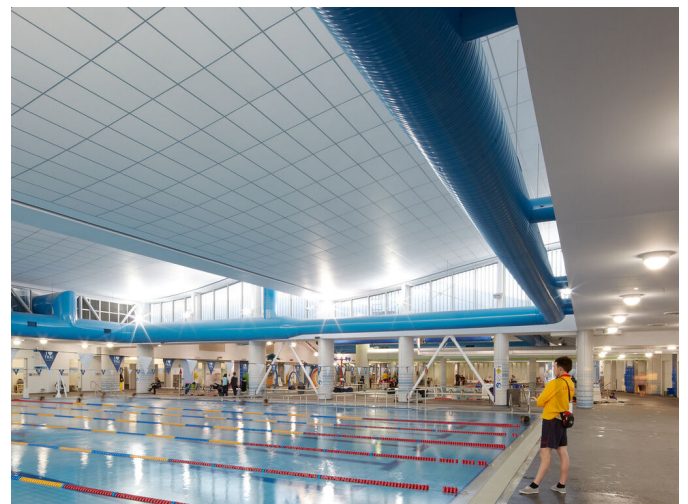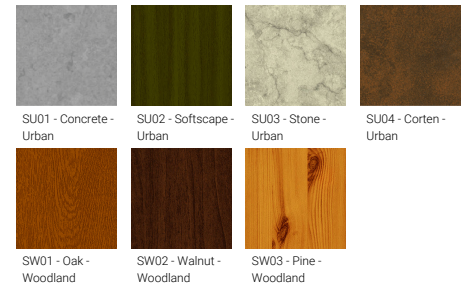


SANDY 2 (SA-31481) (Version 2)

Technical information


Material	Aluminium	Optic value	114°x113°	Operating temperature	-20 °C to 40 °C
Light source	80 LED	CCT / CRI	3000K CRI80, 4000K CRI80	Through wiring	Two cable entries for through wiring
Power	19 W	Bug	B0-U4-G2	Lens / Reflector / Optic	Opal UV-stabilised polycarbonate diffuser
Lumen	1709 - 1799 lm	ULR	50	MacAdam Ellipse	3 SDCM
Efficacy	90 - 95 lm/W	ULOR	50	Lifetime L90B10 (hours)	> 37,000
Driver option	Integral control gear	CIE flux code n°3	68	Lifetime L80B10 (hours)	> 78,000
Driver	Constant current (CC)	Dimming type	On/Off, 1-10V	Lifetime L80B50 (hours)	> 86,000
Input voltage	220-240 V 50/60 Hz	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Variants (On/Off, 1-10V)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Optic	G				
		Weight	2.0 kg		

SA-31481

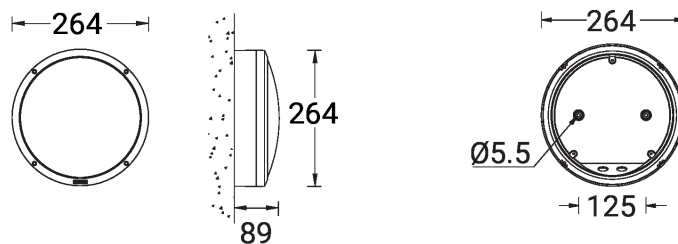

SANDY 2 (SA-31481) (Version 2)

Accessory



Surface mounting box for easy
cabling (SANDY 2)
SCE-SANDY-2



DALI Control System
Control-DALI